ZECA

zeca.it

Avvolgitubo 8400

Hose reels 8400




NEW MODEL

INOX
STAINLESS
STEEL

SERIE 8400 • ANCORA PIÙ FLUIDI

SERIE 8400 • EVEN MORE FLUID

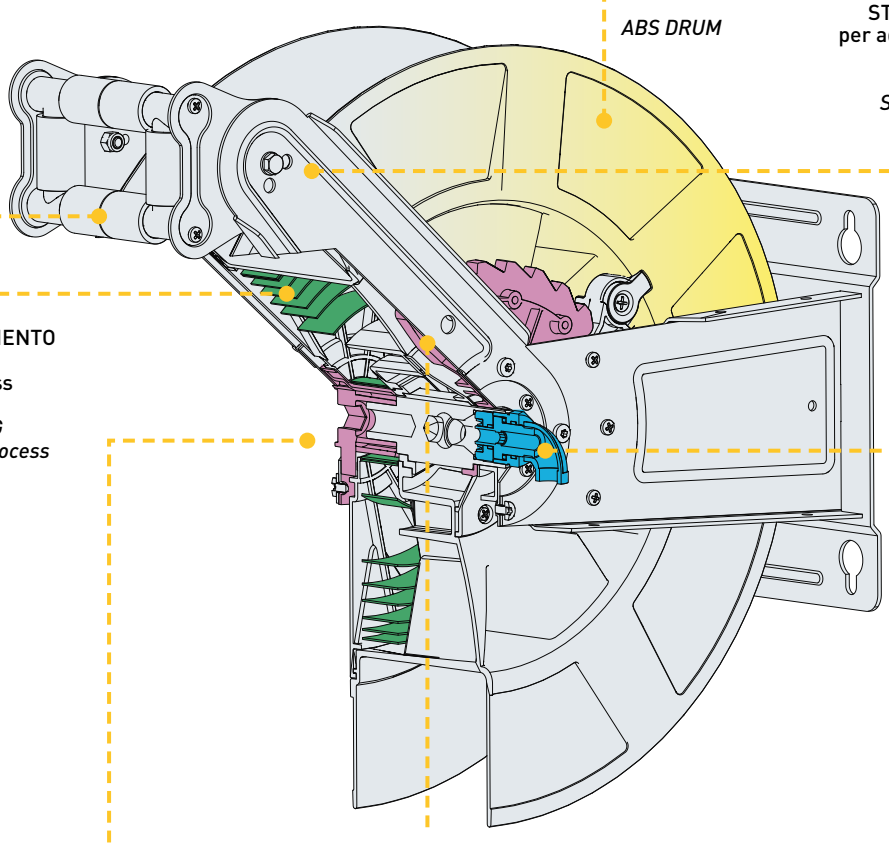

ARIA
AIR

ACQUA CALDA
HOT WATER

GRASSO
GREASE

AD BLUE

ACQUA AD ALTA PRESSIONE
HIGH PRESSURE WATER

OLIO
OIL

DIESEL

CAMPI DI APPLICAZIONE / FIELDS OF APPLICATION

Rifornimento carburante
Refueling

Aeronautica
Aeronautics

Militare
Military

Nautica
Nautical

Miniere
Mines

Edilizia
Construction

Agricoltura
Agriculture

Chimica
Chemical

Autofficine
Auto repair workshops

Industria
Industry

Autolavaggi
Car wash

Pulizie industriali
Industrial cleaning

Industrie alimentari
Food industry


Grandi cucine
Big kitchens

SERIE 8400 FULL INOX/STAINLESS STEEL



· Staffa in acciaio INOX AISI 304
· *Bracket in stainless steel AISI 304*

· Giunto rotante e raccordo in entrata in acciaio INOX
· *Rotating joint and incoming fitting in stainless steel*

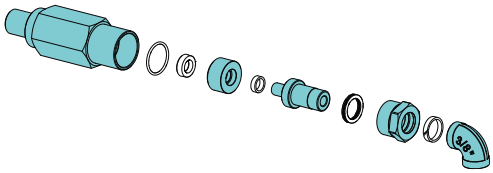

· Raccordo in uscita in acciaio INOX
· *End pipe fitting in stainless steel*


· Viterie in acciaio INOX
· *Screws and bolts in stainless steel*

SERIE 8400 LIGHT INOX/STAINLESS STEEL



· Staffa in acciaio INOX AISI 304
· *Bracket in stainless steel AISI 304*

· Giunto rotante e raccordo in entrata in ottone/acciaio/acciaio INOX
· *Rotating joint and incoming fitting in brass/steel/stainless steel*

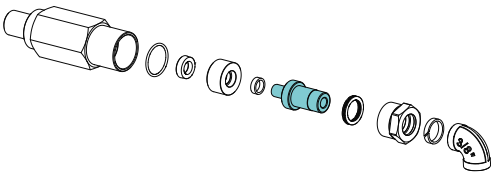

· Raccordo in uscita in ottone/acciaio
· *End pipe fitting in brass/steel*


· Viterie in acciaio INOX
· *Screws and bolts in stainless steel*

SERIE 8400



· Staffe in acciaio verniciato a polveri epossidiche.
· *Brackets in steel, painted with epoxy resin powders.*

· Giunto rotante e raccordo in entrata in ottone/acciaio/acciaio INOX
· *Rotating joint and incoming fitting in brass/steel/stainless steel*

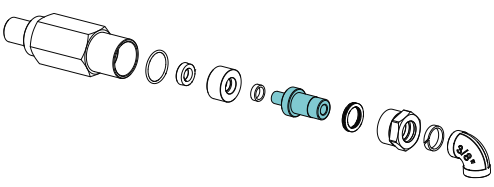

· Raccordo in uscita in ottone/acciaio
· *End pipe fitting in brass/steel*

· Viterie in acciaio
· *Screws and bolts in steel*

SERIE 8400 FULL INOX

SERIE 8400 FULL STAINLESS STEEL



BOBINA ABS

ABS DRUM

Staffa in acciaio INOX AISI 304

Bracket in stainless steel AISI 304

Viterie in acciaio INOX AISI 316L

Screws and bolts in stainless steel AISI 316L

Raccordo in uscita
in acciaio INOX AISI 316L

End pipe fitting
in stainless steel AISI 316L

Guarnizione in FPM (Viton)


FPM Gasket

Albero giunto rotante in acciaio INOX AISI 304

Rotating shaft in stainless steel AISI 304

Ghiera INOX AISI 304

Ring nut stainless steel AISI 304

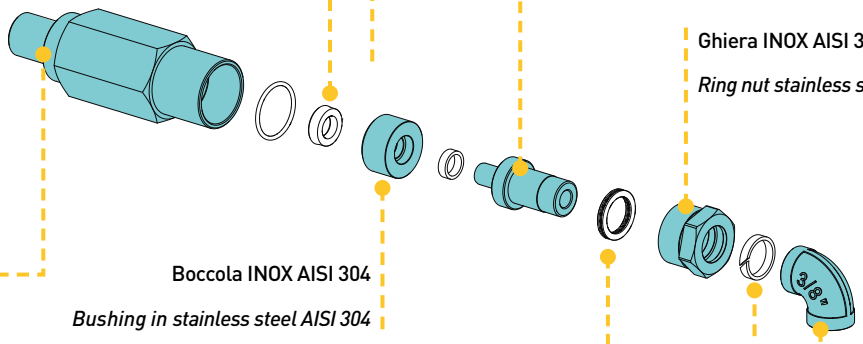

Albero bobina in acciaio INOX AISI 304

Coil shaft in stainless steel AISI 304

Boccola INOX AISI 304

Bushing in stainless steel AISI 304

Cuscinetto assiale a rulli

Axial roller bearing

Anello guida stelo in PTFE

PTFE Rod guide ring

Raccordo in
entrata in acciaio
INOX AISI 316L

Incoming fitting
in stainless steel
AISI 316L

ISO EN 12100
CE
2006/42/CE

	14
	mm 550x505x270 Kg 10

Gli avvolgitubo Full INOX sono idonei in diversi campi di applicazione, dal settore alimentare, alla nautica e al settore chimico, ambienti di lavoro aggressivi e con atmosfere corrosive. Ideali per le pulizie industriali, operazioni di soffiaggio e trasporto fluidi come olio e AdBlue.

The Full Stainless Steel hose reels are perfect for a variety of different applications, from the food and drink industry to the boating industry and the chemical sector, heavy duty work environments with corrosive atmosphere. They are the ideal for industrial cleaning, blowing operations and transport of fluids such as oil and AdBlue.

	Tipo tubo *Hose Type*	**Tubo** *Hose* **Ø**	**Lungh. tubo** *Hose length* **(m)**	**Art.**	**Temperatura fluido** *Fluid temperature*	**Raccordo in uscita** *End pipe fitting*	**Raccordo in entrata** *Incoming fitting*
ARIA - ACQUA *AIR - WATER* **20 bar**	No tubo *No hose*	/	/	**8401/1113**	-15°C/+50°C	1/2" F	1/2" F
	SAE 100R6	10 mm 3/8"	12	**8404/1111**		3/8" M	
			18	**8406/1111**			
	KPU	12,5 mm 1/2"	15	**8426/1111**		1/2" M	
			20	**8427/1111**			
ACQUA *WATER* **15 bar**	PU - FOOD QUALITY*	12,5 mm 1/2"	12	**8432/1111**	-10°C/+60°C		1/2" F
ADBLUE **15 bar**	PVC -PU	19 mm 3/4"	8	**8482/1111**	-10°C/+60°C	3/4" F girevole / *swivelling*	3/4" M
OLIO - ACQUA *OIL - WATER* **200 bar**	No tubo *No hose*	/	/	**8440/1113**	-15°C/+130°C	1/2" F	3/8" F
	EN857 1 SC Nero/*Black*	10 mm 3/8"	15	**8442/1111**		3/8" F girevole / *swivelling*	
			18	**8443/1111**			
	EN 857 1SC Blu/*Blue* Non Marking		15	**8446/1111**			
			18	**8448/1111**			


* NOTA: TUBO CERTIFICATO SECONDO REG. UE 1935/2004 E REG. UE 10/2011 IDONEO AL CONTATTO CON ALIMENTI. NON IDONEO AL PASSAGGIO DI LIQUIDI ALIMENTARI

NOTE: REG. UE 1935/2004 AND REG. UE 10/2011 CERTIFIED HOSE FOR USE IN THE FOOD INDUSTRY. NOT SUITABLE FOR FOOD LIQUIDS TRANSFER.

SERIE 8400 LIGHT INOX

SERIE 8400 LIGHT STAINLESS STEEL



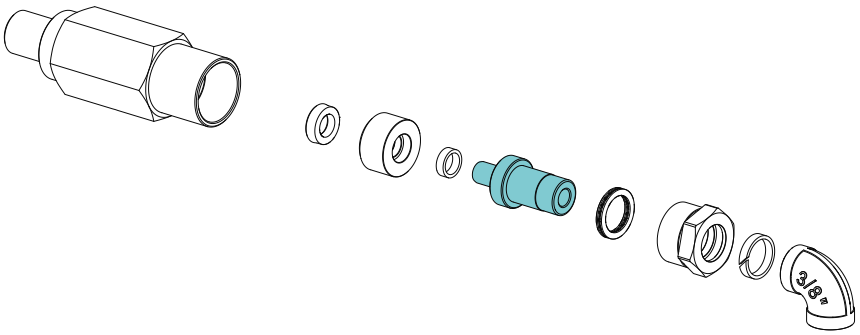

ISO EN 12100
CE
2006/42/CE

	14
1	mm 550x505x270 Kg 10

Gli avvolgtubo Light INOX sono idonei in diversi campi di applicazione, dal settore alimentare, alla nautica e al settore chimico, ambienti di lavoro aggressivi e con atmosfere corrosive. Ideali per le pulizie industriali, operazioni di soffiaggio e trasporto fluidi come olio.

The Light Stainless Steel hose reels are perfect to a variety of applications, from the food and drink industry to the boating industry and the chemical sector, heavy duty work environments with corrosive atmosphere. They are the ideal for industrial cleaning, blowing operations and transports of fluids such as oil.

	Tipo tubo *Hose Type*	**Tubo** *Hose* **Ø**	**Lungh. tubo** *Hose length* **(m)**	**Art.**	**Temperatura fluido** *Fluid temperature*	**Raccordo in uscita** *End pipe fitting*	**Raccordo in entrata** *Incoming fitting*
ARIA - ACQUA *AIR - WATER* **20 bar**	No tubo *No hose*	/	/	**8401/1003**	-15°C/+50°C	1/2" F	1/2" F
	SAE 100R6	10 mm 3/8"	12	**8404/1000**		3/8" M	
			18	**8406/1000**			
	KPU	12,5 mm 1/2"	15	**8426/1002**		1/2" M	
			20	**8427/1002**			
ACQUA *WATER* **15 bar**	PU - FOOD QUALITY*	12,5 mm 1/2"	12	**8432/1001**	-10°C/+60°C	1/2" M	1/2" F
OLIO - ACQUA *OIL - WATER* **200 bar**	No tubo *No hose*	/	/	**8440/1003**	-15°C/+130°C	1/2" F	3/8" F
	EN857 1 SC Nero/*Black*	10 mm 3/8"	15	**8442/1000**		3/8" F girevole / *swivelling*	
			18	**8443/1000**			
	EN 857 1SC Blu/*Blue* Non Marking		15	**8446/1000**			
			18	**8448/1000**			

* NOTA: TUBO CERTIFICATO SECONDO REG. UE 1935/2004 E REG. UE 10/2011 IDONEO AL CONTATTO CON ALIMENTI. NON IDONEO AL PASSAGGIO DI LIQUIDI ALIMENTARI

NOTE: REG. UE 1935/2004 AND REG. UE 10/2011 CERTIFIED HOSE FOR USE IN THE FOOD INDUSTRY. NOT SUITABLE FOR FOOD LIQUIDS TRANSFER.

	Tipo tubo *Hose Type*	Tubo *Hose* Ø	Lungh. tubo *Hose length* (m)	Art.		Temperatura fluido *Fluid temperature*	Raccordo in uscita *End pipe fitting*	Raccordo in entrata *Incoming fitting*
ARIA - ACQUA *AIR - WATER* **20 bar**	No tubo *No hose*	/	/	**8401**	/	-15°C/+50°C	1/2" F	1/2" F
		/	/	**8480**	AISI 316L giunto / *joint*			
	SAE 100R6	6 mm 1/4"	20	**8412**	/		1/4" M	
		8 mm 5/16"	20	**8402**	/			
		10 mm 3/8"	12	**8404**	Ex		3/8" M	
			18	**8406**				
		12,5 mm 1/2"	10	**8408**			1/2" M	
			15	**8410**				
	KPU	10 mm 3/8"	20	**8424**			3/8" M	
		12,5 mm 1/2"	15	**8426**			1/2" M	
			20	**8427**				
ACQUA *WATER* **15 bar**	PU - FOOD QUALITY*	12,5 mm 1/2"	12	**8432**	/	-10°C/+60°C	1/2" M	1/2" F
DIESEL - OLIO *DIESEL - OIL* **15 bar**	PVC - PU	19 mm 3/4"	8	**8415**	/	-10°C/+60°C	3/4" F girevole *swivelling*	3/4" M
AD BLUE **15 bar**	PVC - PU	19 mm 3/4"	8	**8482**	AISI 316L giunto / *joint*	-10°C/+60°C	3/4" F girevole *swivelling*	3/4" M
OLIO *OIL* **160 bar**	EN 857 1SC	12,5 mm 1/2"	10	**8474**	/	-15°C/+120°C	1/2" F girevole *swivelling*	3/8" F
OLIO-ACQUA *OIL WATER* **200 bar**	No tubo *No hose*	/	/	**8440**	/	-15°C/+130°C	1/2" F	
	EN 857 1SC Nero / *Black*	8 mm 5/16"	20	**8441**	/		3/8" F girevole *swivelling*	
		10 mm 3/8"	15	**8442**	Ex			
			18	**8443**				
	EN 857 1SC Blu / *Blue* Non Marking		15	**8446**				
			18	**8448**				
OIL GREASE *OLIO - GRASSO* **400 bar**	No hose No tubo	/	/	**8460**	/	-20°C/+120°C	1/2" F	3/8" F
	EN857 2SC	6 mm 1/4"	12	**8462**	/		1/4" M	
			18	**8463**	/			

* NOTA: TUBO CERTIFICATO SECONDO REG. UE 1935/2004 E REG. UE 10/2011 IDONEO AL CONTATTO CON ALIMENTI. NON IDONEO AL PASSAGGIO DI LIQUIDI ALIMENTARI

NOTE: REG. UE 1935/2004 AND REG. UE 10/2011 CERTIFIED HOSE FOR USE IN THE FOOD INDUSTRY. NOT SUITABLE FOR FOOD LIQUIDS TRANSFER.


OPTIONAL SERIE 8400

COPERCHIO BOBINA / *COIL COVER*



8400/CY

Coperchio bobina giallo
Yellow coil cover

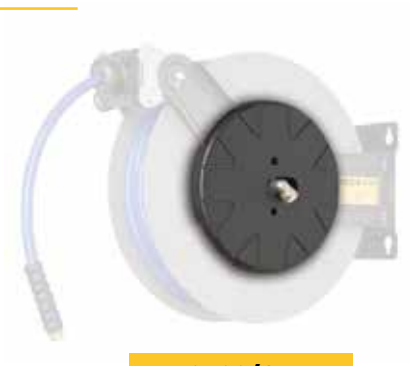

8400/CB

Coperchio bobina nero
Black coil cover

STAFFA ORIENTABILE / *SWIVEL BRACKET*



8400/SW

Staffa orientabile
Swivel bracket




8400/SWI


Staffa orientabile in acciaio INOX
Swivel bracket in stainless steel

INSTALLAZIONI POSSIBILI / *POSSIBLE INSTALLATIONS*


INSTALLAZIONE A PARETE / *WALL INSTALLATION*

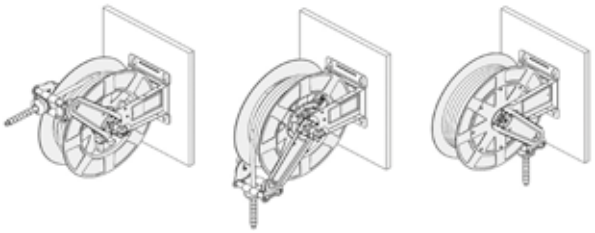


INSTALLAZIONE A SOFFITTO *CEILING INSTALLATION*




INSTALLAZIONE A BANCO *BENCH INSTALLATION*



DIMENSIONS

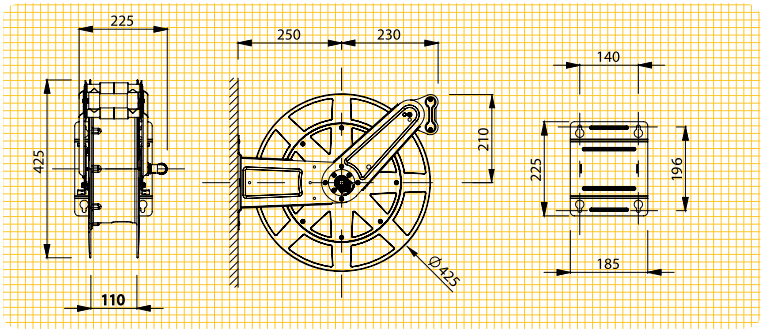

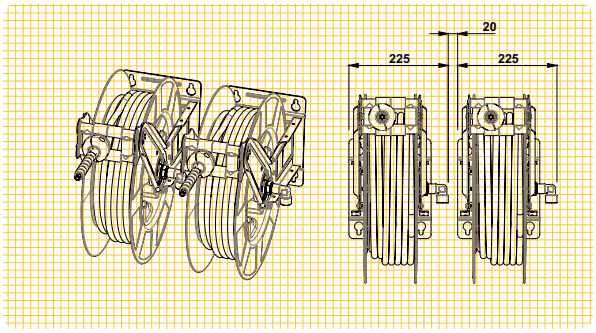

PISTOLE EROGAZIONE ACQUA BASSA PRESSIONE CON GETTO REGOLABILE

LOW PRESSURE WATER GUN WITH ADJUSTABLE SPRAY



	KPW050	KPW060	KPW060I
Materiale corpo *Material body*	PP + GF	PP + GF	PP + GF
Materiale pistone *Material piston*	Ottone / *Brass*	Ottone / *Brass*	Inox Aisi 316
Materiale guarnizione *Material gasket*	Viton	Viton	Viton
Portata massima *Max. flow rate*	50 l/min	60 l/min	60 l/min
Pressione nominale *Nominal pressure*	12 bar / 1.2 MPa	24 bar / 2.4 MPa	24 bar / 2.4 MPa
Temperatura massima uso continuo *Max working temperature*	50 °C / 120 °F	60° / 140 °F	60° / 140 °F
Raccordo in ingresso *Incoming fitting*	Girevole / *Swivel* G 1/2"F	Girevole / *Swivel* G 1/2"F	Girevole / *Swivel* G 1/2"F
Ampiezza getto acqua *Water jet width*	Regolato tramite leva: - leva completamente tirata: getto a spillo - leva rilasciata: getto a cono 60° *Adjustment by handle:* *- fully pulled lever: needle jet* *- lever released: 60 °cone jet*	Vite di regolazione per variare ampiezza cono da 0° a 60° *Adjustment screw ranging cone width from 0° to 60°*	Vite di regolazione per variare ampiezza cono da 0° a 60° *Adjustment screw ranging cone width from 0° to 60°*

PISTOLE AUTOMATICHE DI EROGAZIONE

AUTOMATIC REFUELING NOZZLE



ART. KPE060 D	Pistola automatica erogazione gasolio 60 l/min *Automatic refueling nozzle for gasoline 60 l/min*
ART. KPE090 D	Pistola automatica erogazione gasolio 90 l/min *Automatic refueling nozzle for gasoline 90 l/min*
ART. KPE060 U	Pistola automatica erogazione urea 60 l/min *Automatic refueling nozzle for AdBlue 60 l/min*

ATTENZIONE: non idonee per uso con gas, benzina, olio, alcool e acqua. / ***ATTENTION:*** *not suitable for gas, petrol, oil, alcohol and water.*

Zeca si riserva il diritto di modificare i prodotti per migliorie tecniche o per necessità costruttive o commerciali.

Zeca has the right to make changes on the products for the sake of technical improvements or for any constructive or commercial requirements.

GA/0318/10000

zeca.it

010.445

ZECA S.p.A.

Strada della Chiara, 25
10080 Feletto C.se (TO) Italia

Tel. +39 0124 499611
Fax +39 0124 490669

info@zeca.it
export@zeca.it
italia@zeca.it