



TRYKKLUFT- OG
VERKTØYTEKNIKK

PRODUKTKATALOG



#ikkeforpingler



3–11	Chicago Pneumatic verktøyløsninger
12–14	Chicago Pneumatic verkstedutstyr og tilbehør
15	Chicago Pneumatic momenttrekker
16	ATEX-verktøy fra Chicago Pneumatic
17	ATEX-sager fra Cengar
18–19	Chicago Pneumatic anleggssutstyr
20	FAR nagle- og gjenneinnsatsmaskiner
21	Manuelt momentverktøy – kalibrering
22–24	Chicago Pneumatic skrukompressorer
25–27	Pneumatech luftbehandling
28	Støydempede kompressorer
29	Oljefrie kompressorer
30–31	Chicago Pneumatic stempelkompressorer

MUTTERTREKKERE

Most powerful 1/2" tool on the market in its class



CP7748-2
8941077486



CP7748
8941077481

- 1/2" composite impact wrench
- 1300 Nm maximum real torque in reverse
- One-hand reverse system (Ring system)
- User can easily change direction by pushing buttons or simply turning the ring from anywhere around the tool
- Two power settings forward 40% and 100% power and 100% in reverse

No more guessing – get the power you need with CP7755 series of impact wrenches



CP7755-2
8941077552



CP7755
8941077550

- The best and the most adjustable power control for pneumatic tools
- 5, 10, 15, 20, 25, 30, 35, 40, 45, 50 and 100% of maximum torque
- Composite motor housing 1.93 kg
- Twin hammer mechanism
- Bumpers all over the tool
- Bi-material and bi-color handle and trigger
- Friction ring socket retainer
- Max torque forward: 1080 Nm
- Max torque reverse: 1300 Nm
- Also available with integrated Airflex mini

Compact, more powerful and durable than the competition



CP7737 1/2"
8941077370

- Max. torque: 300 Nm
- One hand operation, forward and reverse
- 3 positions in forward and 1 in reverse
- Jumbo hammer mechanism
- Length: 240 mm
- Weight: 1,1kg

Mini 1/2" compact impact wrench for general maintenance



CP7739
8941077390

- Twin hammer clutch
- Max torque (in reverse): 610 Nm
- Composite handle and magnesium clutch housing
- S2S technology and 3 positive power settings
- Full teasing trigger

Ultra compact 1/2" wrench, easy to use and durable



CP7732C
8941077321

- 625 Nm Max. torque
- Steel front cover & Aluminum body
- One hand operation forward – reverse by either left or
- Right handed users
- 3 setting positions
- Only 4.4" long
- Jumbo hammer

Powerful & lightweight 1/2" Impact Wrench



CP7749-2
8941077493

- 1300 Nm maximum real torque in reverse
- Weight: 1.8 kg
- Length: 171 mm length
- Aluminum alloy front housing
- Composite housing
- 2 modes in reverse: max and low torque
- 2 modes in forward: max and low torque

CP7749
8941077491

MOMENTNØKLER/BATTERIVERKTØY



Workshop torque wrenches with long lasting accuracy and durability



- Accuracy: 4% according to EN ISO 6789:2003 specifications
- Long-lasting accuracy up to 25000 cycles
- Durable: Reliability of the mechanism up to 25000 cycles
- Robust: 54 teeth fixed pear head ratchet with quick socket release
- Comfort: Black aluminum handle resistant to common chemicals in workshops
- Compact: To work in restricted areas
- Fine scale graduation
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case

Model	Part #	Square drive	Capacity	Length	Weight
CP8905	8941089050	1/4"	5-25 Nm	245 mm	1,28 Kg
CP8910	8941089100	3/8"	20-100 Nm	410 mm	1,50 Kg
CP8915	8941089150	1/2"	40-200 Nm	520 mm	2,02 Kg
CP8917	8941089170	1/2"	60-340 Nm	610 mm	1,76 Kg
CP8920	8941089200	3/4"	150-750 Nm	1060 mm	5,84 Kg
CP8925	8941089250	1"	200-1000 Nm	1255 mm	6,84 Kg



BATTERY POWERED

Cordless 1/2" Impact Wrench with 2 shut off positions and 1150+ Nm Power in reverse



- 4 settings in forward, to be set up with the touch pad on the backside of the tool
- Slow mode to approach without impacting
- Fast mode to tighten wheels close to recommended torque without overtightening
- 50%: around 580 N
- 100% of maximum torque around 1150+ Nm
- 1 setting @ full power in reverse 1150+ Nm

CP8849-2 | **CP8849**
8941088494 | 8941088490

Ultra compact for work in small and confined spaces



- LED lighting for dimly lit work areas
- Single-hand forward/reverse operation
- 1/4" quick change bit holder
- Max. torque: 85 ft.lb/115 Nm in reverse
- 2.4 lb/1.1 kg
- 6.3 in/161 mm length
- Bare tool
- 12-Volt CP12XP Lithium-ion 1.5Ah battery

CP8818 Pack |
8941088180

The unrivaled 3/4" Impact wrench



CP7769-6
8941077697

- Socket retainer ring combined with hole retainer
- All controls within reach
- Variable speed trigger
- One-hand power adjustment
- One-hand reverse system
- 1950 Nm of maximum torque

CP7769
8941077691

Champion 1" pistol impact wrench



- Length = 8.1 in. / 205 mm
- All controls within reach
- Variable speed trigger
- One-hand power adjustment
- One-hand reverse system
- 1950 Nm of maximum torque
- Composite motor housing
- Twin hammer mechanism
- 360° swivel air inlet

CP7779
8941077791

1" D-handle impact wrench with dual retainer



CP7782-6 | **CP7782**
8941077826 | 8941077820

- Integrated protective cover on the clutch housing
- Full teasing trigger
- Regulator with integrated forward/reverse with 3-position power settings in both directions
- Maximum Torque: 2600 Nm

Lightweight, Powerful, Easy to use with Great Performance



CP7773D-6 | **7773D**
8941077737 | 8941077731

- Weight: 6.6 kg
- 1760 Nm in reverse
- Twin hammer mechanism
- Intuitive Forward/Reverse lever & power regulator on both sides
- 4 position power settings on both sides
- Aluminum housing
- Composite cover on the clutch housing
- Socket retainer ring

Ergonomic ratchets for the vehicle service industry



- Advanced motor and head design
- Better access in restricted areas
- Free speed: 225 rpm
- Maximum torque: 95 Nm
- Length: 272 mm
- Weight: 1,24 kg

CP7829 | **3/8"**
8941078293

CP7829H | **1/2"**
8941078294

High speed and superior durability ratchet wrench



- High accessibility in tight places
- Great speed control
- Free speed: 280 rpm
- Maximum torque: 35 Nm
- Length: 169 mm
- Weight: 0,5 kg

CP825C | **1/4"**
8941082511

CP825CT | **3/8"**
8941082512

Ultra Compact, Lightweight and Powerful



- 158.7 mm length for restricted working areas
- 3.0 kg for less operator fatigue
- 1420 Nm in reverse for high productivity
- Side2Side forward and reverse system
- One hand Forward & Reverse speed regulator button

CP7762
8941077620

SLIPEMASKINER



Powerful & efficient angle grinder for a wide variety of applications



- M14 spindle thread
- High quality bevel gears & Governed motor
- Robust steel keyless adjustable wheel rotative guard
- 1.1HP - 840 W
- 1000 hour service interval
- Streamline CP Safety Lever
- Free speed: 12 000 rpm
- Length: 270 mm
- Weight: 1,6 kg



CP7550-A
8941075503



Easy to handle & Industrial tough with up to a 1,000 hour maintenance interval



- 1.5 hp (1,100 W) governed motor
- Durable bevel gear
- Spindle lock button
- Keyless rotative guard
- 5" (125 mm) wheel capacity
- M14 spindle thread
- 12,000 rpm free speed
- Weight: 1,9 kg



CP3550-120AA5
6151607780



Superior torque for maximal productivity Industrial angle wheel grinder



- Industrial grade durability with up to a 2,000 hour maintenance interval
- Low vibration sidehandle
- Autobalancer
- Wheel size: 125 mm
- Spindle thread: M14
- Free speed: 12 000 rpm
- Power: 1 800 W
- Weight: 1,9 kg
- Vibration: 4.5 m/s²



CP3650-120AA5VK
6151607180



Highest durability in demanding applications with up to 2,000 hours maintenance intervals



- Low profile angle head
- Double action safety lever
- Wheel size: 180 mm
- Spindle thread: HEX
- Free speed: 8 500 rpm
- Power: 2 100 W
- Weight: 2,7 kg
- Vibration: 5.7 m/s²



CP3850-85AH7VE
6151704930



Check out our Dust Extraction units!



Rettslipere med kraftigere motor og enkel patent på bytte av filer.

Velegnet for bil/lett industri - All grinders include 1/4" and 6 mm collets



Power: 210 W
Free speed: 28 000 rpm
Length: 160 mm
Weight: 0,4 kg

CP7405



Power: 210 W
Free speed: 23 000 rpm
Length: 120 mm
Weight: 0,7 kg

CP7406



Power: 240 W
Free speed: 23 000 rpm
Length: 200 mm
Weight: 0,5 kg

CP7408



Power: 210 W
Free speed: 27 000 rpm
Length: 260 mm
Weight: 0,7 kg

CP7410

Model	Motoreffekt (watt)	Hastighet (rpm)	Lengde (mm)	Vekt (kg)	Best nr.
CP7405	250 W	28000	165	0,5	8941074050
CP7406	250 W	23000	150	0,6	8941074060
CP7408	250 W	23000	190	0,62	8941074080
CP7410	250 W	27000	260	0,65	8941074100

Top productivity thanks to high power and great comfort with our new innovative quickchuck design!

12000 RPM



CP3550-120ES
6151602350



CP3550-120
6151600620

18000 RPM



CP3550-180ES
6151602360



CP3550-180
6151600630

- **New innovative quickchuck design!**
- **1050 W of Power!**
- Industrial die grinder in 12000 rpm and 18000 rpm version, both compact and extended
- Can be used with Erickson 200 collets from 1/8" (3.2mm) up to 3/8" (9.5 mm)
- Delivered with a Erickson 200 collet for 1/4" and 6 mm mounted points or carbide burrs



Industrial angle die grinders with great productivity and unbeatable durability



- Industrial angle die grinder
- Optimal productivity
- Up to 2,000 hours maintenance intervals
- 1/4" (6.35 mm) collet holder
- 0.5 hp (375 W) governed motor
- 12,000 rpm free speed

CP3019-12AC
6151604070



- Industrial angle die grinder
- Up to 2000 hours maintenance intervals
- Rear exhaust
- 1/4" (6.35 mm) collet holder
- 0.5 hp (375 W) governed motor
- 25,000 rpm free speed

CP3019-25
6151600110



- Industrial angle die grinder
- Up to 2000 hours maintenance intervals
- 1/4" (6.35 mm) collet holder
- Extended body
- 0.5 hp (375 W) governed motor
- 25,000 rpm free speed

CP3019-25ES
6151602180

PUSSEMASKINER

Ergonomic orbital palm sanders for all applications

Low vibrations contribute to great productivity and safety

Powerful and easy to use for vertical and horizontal applications
Soft grip, tear drop design for perfect control
Low noise level, Central Vacuum
Shut-off and speed control switch

3 variations for different applications:

2.5 mm: used for final sanding, finishing, and pre-polishing processes

5 mm: great for surface preparation from body filler to paint primer

10 mm: great for heavy material removal such as body filler



Model	Part #	Pad diameter	Orbit diameter	Power	Free Speed
CP7225CVE-3	8941272258	75 mm	2.5 mm	210 W	12 000 rpm
CP7255CVE-3	8941272558	75 mm	5 mm	210 W	12 000 rpm
CP7215CVE	8941272153	150 mm	10 mm	210 W	12 000 rpm



Industrial angle sanders – Ideal for versatile sanding applications

*Delivered without roloc pad



- Power: 375 W
- Free speed: 20 000 rpm
- Spindle thread: 1/4"-20 UNC
- Free speed air consumption: 8,3 l/s
- Weight: 0,63 kg

CP3019-20AF
6151607090



- Power: 375 W
- Free speed: 12 000 rpm
- Spindle thread: 1/4"-20 UNC
- Free speed air consumption: 9,3 l/s
- Weight: 0,63 kg

CP3019-12AF
6151607080



CP3550-030aa – Low speed sander for sanding and polishing applications

- High stall torque beneficial for polishing operations
- 3000 RPM and 1050 W Power, perfect for sanding operations on stainless steel and composite
- Excellent ergonomics
- Spindle lock button for easy change of abrasive
- Backing pad (non-included accessory) Soft: 6159901330 Hard: 6159901340
- To be used with 7" and 9" backing pads with M14 output shaft thread



CP3550-030AA
6151620300



CP3650-085AB Industrial angle sander High performance and ergonomics

- High power and torque motor
- Superior durability bevel gear
- Spindle lock button
- 7" (180 mm) pad capacity
- 2.4 hp (1,800 W) high performance governed motor
- 8,500 rpm free speed
- 5/8" 11 Spindle
- Extraction kits are available
- Vibration: 3.4 m/s²

With 5/8" 11 Spindle

CP3650-085AB
6151620190

With M14 Spindle

CP3650-085AAE
6151607260



CP3550 SANDERS

Industrial performance

Model	Part #	Free Speed	Power		Abrasive Capacity	Spindle Thread	Tool Weight	Sound Power	Air Inlet
		RPM	hp	W	mm	in.	kg	dB(A)	in.
Angle Sanders									
CP3550-085AB	615 162 0350	8,500	1.5	1,100	125	5/8-11 UNC "	1.5	93	3/8
CP3550-120AA	615 162 0360	12,000	1.5	1,100	125	M14	1.5	95	3/8
CP3550-120AB	615 162 0370	12,000	1.5	1,100	125	5/8-11	1.5	95	3/8



Easy handling – Large removal 20mm Belt sander



- Quick-change belt replacement
- Sanding belt size: 20x 520 mm
- Free speed: 20 000 rpm
- Power: 380 W
- Length: 380 mm
- Weight: 1,5 Kg

CP9780 | 6151939780

Flexible 10mm belt sander



- Excellent for paint removal, weld sanding, smoothing and rust removal in tight areas
- Sanding belt size: 10x 330 mm
- Free speed: 22 000 rpm
- Power: 260 W
- Weight: 0,90 Kg

CP9779 | 6151939779

Low vibration Air reciprocating saw



- Very low vibration
- 10 mm stroke length
- Great power and speed of 10,000 strokes per minute
- 360° swivel air inlet
- Premium tool for all cutting applications

CP7901 | 8941079011

Air riveter for General Maintenance or Light-duty Production



- Compact size and composite body
- 1/4" (6.4 mm) max. capacity
- Heavy pulling: up to 3,530 lbs (1.6 T)
- Low vibrations and low noise level
- Includes: 4.8, 6.4, and 6.4 mm monobolt nose pieces
- Jaw, syringe, service wrenches and oil bottle

CP9884 | 8941098840

NEEDLE SCALERS & HAMMERS



- General purpose needle scaler
- Compact and lightweight
- Delivered with a set of needles 12 x 3 mm
- Ideal for surface clean-up work

CP7115 | 8941071150



- Converts into a chipping hammer
- Quick change chisel retainer
- Adjustable sleeve, 19x3 mm steel needles and 35mm width chisel with high resistance to wear

CP7120 | 8941071200



- Straight chipping hammer
- Lightweight and Compact
- Easily converts to needle scaler
- Power: 2.9 Joules

B15B | 6151740230



- Straight vibration-damped needle scaler
- Perfect tool for long hours of operations
- Power: 1.8 Joules
- Blows per minute: 2400

B16MV | 6151740500

INDUSTRI MUTTERTREKKERE

The most productive 1-1/2" with unbeatable power and ergonomics



CP6120-D35H
6151590120

- Extremely comfortable handle and adjustable support handle
- Extremely low lateral vibrations for best comfort and safety
- Working torque range forward: 815-2710 Nm
- Maximum torque in reverse: 4880 Nm
- Free Speed: 3500 rpm
- 960 blows/minute
- Length: 420 mm

Powerful, Robust & Comfortable 1-1/2" impact for Industrial Maintenance



CP6930-D35
6151590390

- Durable twin hammer clutch with oil bath
- Robust aluminum body & clutch housing
- Reversible D-type side handle
- Maximum torque in reverse: 3900 Nm
- Free Speed: 4300 rpm
- 850 blows/minute
- Length: 440 mm

Compact, robust and powerful impact for industrial maintenance applications

- Very powerful twin hammer clutch
- Working torque range forward: 350-1290 Nm
- Maximum torque in reverse: 1630 Nm
- Free Speed: 6300 rpm
- 900 blows/minute
- Length: 222 mm
- Weight: 5,5 and 5,6 Kg



CP6763 | 3/4" |
6151590400

CP6773 | 1" |
6151590410

The Super Industrial 1" with renewed design



- Operator comfort and control even at VERY high torque
- Progressive torque thanks to the 2-Jaw clutch
- Working torque range forward: 1220-2440 Nm
- Maximum torque in reverse: 3790 Nm
- Free Speed: 3500 rpm
- 1020 blows / minute
- Length: 360 mm

CP0611-D28H
6151590160

The best heavy-duty 1/2" for the toughest jobs!



- 1/2" Square drive
- Up to 850 Nm torque
- Free Speed: 6400 rpm
- 1320 blows/minute
- Length: 178 mm

CP6500-RSR
T025216

Super Industrial 1" impact wrench



- 1" Square drive
- High torque - up to 3790 Nm
- Free Speed: 3500 rpm
- 1020 blows/minute
- Length: 272 mm

CP0611P-RS
6151590050

New Airhammer kits from Chicago Pneumatic with everything you need to get the job done

Choose your power CP7160K: 8 Joules or CP7165K: 11 Joules



8 Joules
CP7160K
8941071601



11 Joules
CP7165K
8941071651

- Air cushion present in the tool reducing vibration to 4.37 m/s²
- Rubber grip at the back of the tool & Well balanced tool
- Back of the tool designed for great handling
- Quick change chisel retainer (provided with the tool)
- Adjustable power (4 power settings)

The kit is supplied with:

- A bare tool (CP7160 or CP7165)
- A quick change retainer
- A spring retainer
- A mini oiler
- A Chicago Pneumatic soft bag
- 5 chisels

BOREMASKINER

CP1114 SERIES

Our latest industrial drill series

Powered by a 0.5HP (410W) motor, these reversible pistol drills are perfect for drilling, tapping and reaming in industrial production and maintenance applications. Available in 4 speeds: 500, 900, 2600, and 4000 RPM the CP1114R cover a large variety of applications, from aluminum to stainless steel.

The unique CP Ergo Wing design allows a comfortable and safe grip for operators while the three full caged planetary gears offer a high level of durability, with 800 hours service intervals. As a result a best in class run out (below 0.15mm) is achieved for high precision drilling and tapping.



Model	Part #	Free Speed	Power		Max Torque	Chuck Capacity	Spindle Size	Tool Weight	Air Inlet	Price
		RPM	hp	W	Nm	mm	in.	kg	in.	
CP1114R05	615 1580 310	500	0.5	410	25.2	13	3/8-24"	1.3	1/4"	6170,-
CP1114R09	615 1580 320	900	0.54	400	16.8	13	3/8-24"	1.8	1/4"	6170,-
CP1114R26	615 1580 330	2600	0.54	400	5.5	10	3/8-24"	1.3	1/4"	5340,-
CP1114R40	615 1580 340	4000	0.54	400	1.7	10	3/8-24"	1.3	1/4"	5340,-
ATEX CERTIFIED CP1114R05 ATEX	615 1580 380	500	0.55	410	25.2	13	3/8-24"	1.3	1/4"	9710,-
ATEX CERTIFIED CP1114R26 ATEX	615 1580 390	2600	0.55	410	5.5	10	3/8-24"	1.3	1/4"	9710,-



CP1117 Series

The best power to weight ratio

Improve your productivity thanks to high power & speed. Operator comfort thanks to exclusive ergonomic features. Drills for Industrial Production designed for intensive duty and high durability



Choose between with chuck, without chuck or keyless

Model	With Chuck Part #	Without Chuck Part #	Keyless Part #	Free Speed	Power		Chuck Capacity	Spindle Size	Tool Weight	Air Inlet	Price
				RPM	hp	W	mm	in.	kg	in.	
CP1117P05	615 1580 170	615 1580 240	615 1580 180	500	1	750	13	3/8-24"	1.53	1/4"	6620,-
CP1117P09	615 1580 150	615 1580 230	615 1580 160	900	1	750	13	3/8-24"	0.99	1/4"	6620,-
CP1117P26	615 1580 130	615 1580 220	615 1580 140	2600	1	750	13	3/8-24"	0.99	1/4"	5960,-
CP1117P32	615 1580 110	615 1580 210	615 1580 120	3200	1	750	13	3/8-24"	0.99	1/4"	5960,-
CP1117P60	615 1580 090	615 1580 200	615 1580 100	6000	1	750	13	3/8-24"	0.99	1/4"	5960,-
ATEX CERTIFIED CP1117P05 ATEX	615 1580 350	n/a	n/a	500	1	750	13	3/8-24"	0.99	1/4"	10 140,-
ATEX CERTIFIED CP1117P26 ATEX	615 1580 370	n/a	n/a	2600	1	750	13	3/8-24"	0.99	1/4"	9890,-
ATEX CERTIFIED CP1117P32 ATEX	615 1580 360	n/a	n/a	3200	1	750	13	3/8-24"	0.99	1/4"	9890,-

High quality yet affordable jack stands



FEATURES

- Feet with extra large plate
- Self locking handle & locking pin
- Ductile iron support column & rugged steel frame construction
- Ratchet action for height adjustment
- Sold in pairs

Model	Part #	Capacity Kg	Max. Height mm	Min Height mm	Net Weight kg	Stroke mm	Price
CP82020	894 1082 020	2000	425	280	2,5	182	820,-
CP82030	894 1082 030	3000	455	300	3	182	1100,-
CP82060	894 1082 060	6000	620	400	5	258	1670,-

High capacity, high quality and quick height adjustments



- Capacity: 12 tons
- Max Height: 450 mm
- Min. Height: 300 mm
- Net Weight: 10 kg
- Stroke: 150 mm

CP82120 | 8941082120



- Capacity: 20 tons
- Max Height: 500 mm
- Min. Height: 350 mm
- Net Weight: 18 kg
- Stroke: 150 mm

CP82200 | 8941082200



Robust and very low profile trolley jacks

Model	Part #	Length	Lifting Capacity	Price
CP80015	8941081015	920 mm	1,5 t	8930,-
CP80020	8941181020	750 mm	2,0 t	6420,-
CP80030	8941181030	779 mm	3,0 t	9310,-

High stability, durable and sturdy precision workshop presses



Model	Part #	Capacity	Min. Press Height	Max. Press Height	Price
CP86200	8941086200	20 t	185 mm	1175 mm	22 430,-
CP86300	8941086300	30 t	151 mm	1031 mm	42 750,-
CP86500	8941086500	50 t	68 mm	1048 mm	61 540,-
CP86750	8941086750	75 t	170 mm	884 mm	85 460,-
CP86100	8941086100	100 t	114 mm	814 mm	139 000,-

FEATURES

- 2 holes in each foot to fix in the floor
- Steel frame
- 2 step stroke system
- Large gauge measuring short and metric tons
- Delivered with 2 V blocks
- Easy to use handle with rubber grip
- Delivered with a quick chuck and 8 punches

Chicago Pneumatic enhances its workshop equipment range with new High Capacity and Great Durability Air-hydraulic Jacks

Ideal for easily accessing lifting points on low chassis trucks



FEATURES

- Air powered piston
- Includes 2 extensions for higher lifting
 - Stored on handle for transport
- Piston and pump
- Anti dust seals for high durability
- Convenient joystick controls
- Cylinder mounted carrying handle
- 1.3 m / long handle bar (1 piece handle) allows easy access to controls when fully positioned under vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels

Model	Part #	Max. Height	Lifting Capacity
CP85030	8941085030	409 mm	30/15 t
CP85031	8941085031	772 mm	30 t
CP85050	8941085050	472 mm	50/25/15 t
CP85080	8941085080	563 mm	80/50 t
CP85100	8941085100	610 mm	100/60/33 t

Versatile Bottle Jacks with capacity and durability

The CP bottle jack range is equipped with a powerful mounted manual pump hydraulic system. Used on light or heavy vehicles, they are compact and versatile. The integrated safety valve prevents overloading and the large base provides high safety and great stability.

FEATURES

- Double guidance & chromed plated steel piston made of one piece
- Automatic welded construction
- Large base plate
- Safety valve against overloading
- Handle on pump in two parts to assemble/disassemble
- Handle supplied with a small hook to get from under the vehicle
- Ideal to be used in combination with the CP jack stands



Model	Part #	Capacity	Net Weight	Dimensions A+B	Dimensions D
CP81020	8941081020	2 t	2.4 kg	295 mm	347 mm
CP81030	8941081030	3 t	2.9 kg	304 mm	366 mm
CP81050	8941081050	5 t	3.8 kg	320 mm	390 mm
CP81080	8941081080	8 t	5.8 kg	322 mm	394 mm
CP81120	8941181120	12 t	6.7 kg	275 mm	347 mm
CP81200	8941081200	20 t	9.1 kg	268 mm	308 mm
CP81201	8941081201	20 t	13.2 kg	444 mm	514 mm
CP81300	8941081300	30 t	18.3 kg	445 mm	445 mm
CP81502	8941081502	50 t	35.3 kg	482 mm	482 mm

ALL-PURPOSE HOSE REELS WITH GREAT DURABILITY



HR8108 & HR8208



HR 8110 & HR 8210



HR 8113



HR 9110 & HR 9113

Model	Part #	Hose material	Hose reel material	Inner diameter	Length	Net weight	Outer diameter
BSP HR8108	8940171991	Polyurethane	Composite	8 mm	10 m	4 kg	12 mm
BSP HR8110	8940171993	KPU	Composite	10 mm	16 m	7,6 kg	14 mm
BSP HR8113	8940171999	KPU	Composite	13 mm	16 m	10,7 kg	17 mm
BSP HR8208	8940171995	KPU	Aluminum	8 mm	10 m	5,2 kg	12 mm
BSP HR8210	8940171997	KPU	Aluminum	10 mm	16 m	9,2 kg	14 mm
BSP HR9110	8940172001	KPU	Composite	10 mm	20 m	13,2 kg	14 mm
BSP HR9913	8940172003	KPU	Composite	13 mm	15 m	13,8 kg	17 mm

CP Air Flex makes rigid hoses flexible and multi-directional



Air Flex

Less effort due to hose rigidity, makes work easier in hard to reach areas
No more premature hose wear
No twisting, the hose remains in the ideal working position and lower the risk of tendinitis

360° Swivel air inlet

Aimed to improve the working ergonomics.



High quality blowguns, standard, extended and silenced



Model	Part #	Recommended max. air flow
Air Flex 1/4"	8940171568	12 l/s
Air Flex 3/8"	8940171570	35 l/s
Air Flex 1/2"	8940171566	35 l/s
1/4" 360° BSP Swivel	8940158412	

Model	Part #
Blow gun standard	6158112690
Blow gun standard with silencer	6158112700
Blow gun extended	6158112710
Blow gun extended with silencer	6158112720

DON'T FORGET!

Remember to lubricate your air tools!

The appropriate care of pneumatic tools is key to ensure productivity, meet clients' demands and operators' safety.

Planning your pneumatic tools' maintenance is the key to success! Remember this maintenance can be done in-house if you have the expertise, but if you need help you can count on your distributors or external authorized repair centers.



Grease Gun

C098689

Air Tool Oil - 120 ml

CA149661




BATTERIMOMENTTREKKERE

NYHET! CP86-SERIEN MOMENTTREKKER MED DIGITAL INNSTILLING OG KONTROLL

CP86 kan brukes som singel trekker eller sammen med CPLinQ. Med CPLinQ har man full kontroll på tiltrekningen og kan dokumentere prosessen. Sist men ikke minst: mye raskere enn hydraulisk verktøy.

Trekkeren har en presisjon og repeterbarhet på +/-4%. Med kompakte mål, den nye batteriteknologien har du tilgang på en kraftpakke av en momenttrekker.

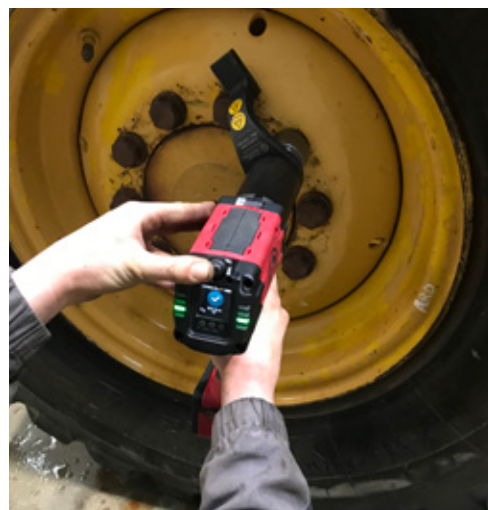

Opp til 8100 Nm med +/-4% presisjon

Sikker to-trinns start

Mobilløsning med 36V/2,5Ah batteri

Girbox fra CP66-serie

Ny motor

Automatisk frigjøring av motholdsarm

Innovativ skjerm

Ergonomisk grep

IEC-sertifisert verktøy

Robust oppbygging

Bruksområder: Anleggsmaskiner, jernbane, landbruk, off-road, skip og plattform, metallstrukturer, energisektor

Modell	Moment (Nm)	Turtall (rpm)	Vekt (kg)	Firkant (tom)	Støy/vibrasjon (dB(A)/m/s ²)	Syklus pr batteri (stk)	Nøyaktighet (6 sigma std avvik)
CP8613	300-1300	10	5	3/4	70/<2,5	250	+/- 4%
CP8626	700-2600	5	5,7	1	70/<2,5	180	+/- 4%
CP8641	1000-4100	3	9	1	70/<2,5	90	+/- 4%
CP8681	2600-8100	1,2	14	1 1/2	70/<2,5	-	+/- 4%

*) Prisen er for single verktøy i transportkoffert med lader og to batterier.

MUTTERTREKKERE OG GNISTFRITT TILBEHØR

ATEX MUTTERTREKKERE

Støvsikker eksopatent med ATEX sertifikat, IP6 støvtestet



Modell	Firkant (tom)	Arbeidsmoment (Nm)	Max moment (Nm)	Vekt (kg)	Støy/vibrasjon (dB(A)/m/s ²)	Luftforbruk (l/sek)
CP6748EX-P11R	1/2	180-760	1085	2,4	93/8,7 (2,2)	14,2
CP6768EX-P18D	3/4	400-1400	1750	4,4	94/9,4 (2,4)	18
CP6778EX-P18D	1	400-1400	1750	4,6	94/9,4 (2,4)	18

GNISTFRIE PIPER

Våre gnistfrie piper er tydelig merket med dimensjon og er produsert av Berylliumskobber hvilket er en av de beste gnistfrie legeringene.

Normalt lagerførte dimensjoner i mm:

1/2" kort og lang type	3/4" kort og lang type	1" kort og lang type	1 1/2" std lengde
13	24	30	50
14	27	32	55
15	29	34	60
16	30	36	65
17	32	38	70
18	36	41	75
19	41	42	80
22	46	43	
23		46	
24		50	
25		60	
26			
27			
28			
29			
30			
32			
36			



Mange andre dimensjoner på forespørsel. Relativt korte leveringstider. Spør oss om andre typer gnistfrie verktøy også.

OFFSHORE STIKKSAGER

CENGAR

Cengar stikksager med ATEX godkjenning finnes i flere varianter både for bruk av baufilblad eller modeller som kan benytte 19 eller 25mm brede blader. Sagene bruker utrolig lite luft og både enkle og trygge å arbeide med. Viktig å huske å smøre sagen og fylle oljereservoaret under stoppknappen. Det gir mindre friksjon, lenger levetid og raskere utførelse av jobben.

PL905FT

Den mest kompakte modellen. Bruker baufilblad og er super å bruke ved håndholdt skjæring av materialer opptil 50mm tykkelse.



CL50FT

Denne modellen har lenger slaglengde og kan spennes opp i egen oppspenning. For seksjoner opp til 150mm.



CL75

Denne er lik CL50, men er beregnet på 19mm sagblader. Kan og spennes opp. For seksjoner opp til 150mm.



Oppspenning for CL50/75 med automatisk mating



Oppspenning for CL50/75 med manuell mating



Modell	Bladkapasitet (mm)	Slag/min (ant)	Slaglengde (mm)	Luftforbruk (l/min)	Vibrasjon (m/s ²)	Lengde (mm)	Vekt (kg)
PL905FT	12	2000	22	116	1,9	300	2,4
CL50FT	12	1200	45	168	3,2	400	2,5
CL75	19	1200	45	168	3,2	400	2,5

Sagblader – HSS sagblader av meget høy kvalitet – disse splintres ikke og er sammen med Cengar sine sager ATEX godkjent.

Tips: Som generell regel kan vi si at man bør ha mellom 6 og 12 tenner i kontakt samtidig i arbeidsstykket.

Modell	Mål l (mm)	Tanning (tpi)	Pakkestørrelse (stk)
HP300	12x300	14, 18, 24 og 32	50
MC220	12x220	14, 18 og 24	50
MB150	19x150	10-14, 18 og 24	5
MB200	19x200	10-14, 18 og 24	5
MB250	19x250	10-14, 18 og 24	5
MB300	19x300	10-14, 18	5

Smøring for Cengar sag: Green oil finnes i 100, 250 og 5000ml kanner – miljøvennlig og trygg i bruk.

SLÅENDE VERKTØY

CP-9CS kombinert bor og meiselmaskin

Bestselger gjennom årtier. Borer og meisler betong, lett stein osv.

CP-9CS – 3400 slag/min – vekt 4,0kg – Lengde 375mm – Drillrate 100 mm/min i betong

Flatemeisel, 25x250mm	PV-100400
Bredmeisel, 75x250mm	1509440015
Piggmeisel, 25x250mm	PV-100500
SDS-adapter	R137586



Bor for CP9

Produkt nr.	Produktbeskrivelse
CP93313	Bor CP9 330x1/2"
CP93314	Bor CP9 330x14mm
CP93316	Bor CP9 330x16mm
CP93319	Bor CP9 330x19mm
CP93322	Bor CP9 330x22mm
1509330025	Bor CP9 330x25mm
1509330028	Bor CP9 330x28mm
CP94314	Bor CP9 430x14
CP94316	Bor CP9 430x16mm
CP94319	Bor CP9 430x19mm
1509432022	Bor CP9 430x22mm
CP94322	Bor CP9 430x22mm
CP94325	Bor CP9 430x25
1509432025	Bor CP9 430x25mm
1509432028	Bor CP9 430x28mm
CP94332	Bor CP9 430x32

GV5 Meiselmaskin

Meiselmaskin for industri, betong og entreprenørarbeider

6151740170 – 2400 slag/min – 28x52,5 bor/slag – sekskant nakke 19x50mm rund krage

Flatmeisel	6158040950	19x300mm
Piggmeisel	6158040930	19x300mm
Bredmeisel	6158040970	60x250mm



Kontakt oss for andre meiselmaskiner

ANLEGGsverktøy

MK-305-A2 slagghakke med vibrasjonsdemping

Flott slagghakke, med blåsing i senter på meisel, slank modell

MK-305-A2 – 720 slag/min – Vekt 1,0kg – Lengde 255mm – 78 dB – 3,8/ m/s²

Flatmeisel	MK-3.10.040-01	15x100mm
	MK-3.10.041-01	35x100mm



8900005002 CP1300 smørepotte for trykkluftmaskiner

Smørepotte med klokoblinger for anlegg og industriverktøy. 1,3l oljevolum, justerbar smøremengde

Vekt 3kg



8900000150 CP4611P meiselmaskin, ultra-heavy duty

En supersterke meiselmaskin for bruk hvor andre luftmaskiner må gi opp.

Bruksområder: forbrenningsovn, smelteovner, hugging av bolter og nagler på lastebil, betong m.m.

720 slag/min – Vekt 15,0 kg – Lengde 660mm – 280mm slaglengde

Flatmeisel 3083414010 305mm (betong, ildfast stein o.l.)

Huggmeisel 3083414500 244mm (hugging av nagler/bolter)

Dormeisel 1/2": 3083414700 –

5/8": 3083414710 –

3/4": P071008 –

7/8": P071009 –

1": P072216



BLINDNAGLEPISTOLER/GJENGEINNSATSVERKTØY

Blindnagle/ «Pop»-nagletenger

K39: Manuell nagletang i sett med div nagler – kap 2,4-4,8mm alunagler – munnstykker medfølger
Vekt: 0,55kg, lengde 275mm

K5/96: Manuell nagletang – trekkspilltype – kap 2,4-6,4mm alunagler
Vekt: 1,75kg, lengde 300-830mm



RAC182 Trykkluftdrevet blindnagletang – kap 2,4-6mm alunagler

Vekt: 1,7kg, 295mm byggehøyde, innebygget vacuumfunksjon



RAC171 Trykkluftdrevet blindnagletang – kap 4,8-7,8mm alunagler

Vekt: 2,9kg, 325mm byggehøyde, innebygget vacuumfunksjon. Mange spesialvarianter er også tilgjengelig.



Tang for gjengeinnsatser:

KJ21 manuell tang for gjengeinnsatser – kap M3-M8 – drivere til disse medfølger

Vekt: 1,25kg, lengde 350mm



KJ60 trykkluftdrevet tang for gjengeinnsatser – kap M3-M8 – drivere medfølger

Vekt: 2,2kg, lengde 295mm. Enkel høyre/venstregang. Opphengsbøyle



KJ45/S trykkluftdrevet tang for gjengeinnsatser – kap M4-M12 – drivere medfølger

Vekt 2,2kg, lengde 296mm. To knapper for høyre/venstre. Opphengsbøyle



MANUELLE MOMENTNØKLER / MOMENTFORSTERKERE

Momentnøkler, fast skrallehode, industriversjon Premium Novatork

STM-serien har ergonomisk håndtak, lett synlig momentinnstilling. Serien har fast skrallehode.

M-serien momentforsterkere



STMX momentnøkler



Modell	Kapasitet (Nm)	Firkant	Lengde (mm)	Bredde (mm)	Vekt (kg)	
STMX3100	20-100	1/2"	442	48	1,1	
STMX3200	40-200	1/2"	515	48	1,3	
STMX3300	60-300	1/2"	565	48	1,4	
STMX3400	80-400	1/2"	700	50	1,7	
STMX3400	80-400	1/2"	700	50	1,7	
STMX4550	110-550	3/4"	889	70	3,6	
STMX4750	150-750	3/4"	1110	70	4,2	
STMX4850	200-850	3/4"	1210	70	4,7	
STMX41000	200-1000	3/4"	1210	70	4,7	
STMX51500	300-1500	1"	1710	90	6,5	Leveres med forlenger
STMX52000	400-2000	1"	1810	90	6,8	Leveres med forlenger

Andre modeller på forespørsel med/uten løst hode og innstikksnøkkel

Momentforsterkere:

Momentforsterkerne finnes med kapasiteter fra 1000Nm til 10000Nm

Modell	I/O Firkant	Utvexling	Max moment (Nm)	BxHxL (mm)	Vekt (kg)
M51000	1/2-3/4"	5:1	1000	118x98x82-196	1,2
M51500	1/2-1"	5:1	1500	118x115x82-196	1,2
M3.31000	1/2-3/4"	3,3:1	1000	71x85x245/175	2,75
M3.31000T1	1/2-1"	3,3:1	1000	71x85x245/175	2,75
M252500	1/2-1"	25:1	2500	118x150x82-196	10,1
M253500	1/2-1 1/2"	25:1	3500	118x164x82-196	10,3

4000, 6000, 8000 og 10000Nm på forespørsel

INDUSTRIKOMPRESSORER

Vi både kan kompressorer og har en fantastisk produktbredde. Vi har kompressorer all type industri fra små kompakte kompressorer til store avanserte industrikompressorer. Produktsortimentet kompletteres med tørker, filterløsninger, rørsystemer, gassgeneratorer (nitrogen og oksygen) og alt annet tilbehør som trengs for et moderne trykkluftanlegg.

Når trykkluftanlegget er på plass har vi alle de service og ettermarkedsprodukter og tjenester din bedrift har behov for.

Chicago Pneumatic har siden 1901 arbeidet med industrien og det kan du som kunde virkelig dra nytte av og sammen med oss velge riktig produkt og teknisk løsning for din produksjon.

CPBg girdrevne mellomstore kompressorer gir mye luft i forhold til tilført energimengde. Typiske brukere er verksted, produksjonsbedrifter m.m. Våre girdrevne modeller fra 15-37 kw kan leveres med tilpassede trykktanker og integrerte kjøletørker. Electronicon touch kontrollpanel er enkelt, oversiktlig og gir optimal energistyring. God plass i kabinett gir oversiktlig og optimal plassering av komponentene som skal serves. Markedets beste på lave levetidskostnader.

Leveres i 3 hovedversjoner: gulvmontert (base), tankmontert med eller uten kjøletørke.

Leveringskapasitet: 2266-6167 l/min – 15-37kw – 230-3fas eller 400V strøm



Vi har mer enn
3000 kompressorer
i drift i norsk industri

Type	l/min				Motoreffekt		Lydnivå dB(A)	Byggemål LxBxH (mm)
	7,5 bar	8 bar	10 bar	13 bar	hk	kw		
CPBg 20	2696	2536	2266	1946	20	15	67	Base: 1200x835x1220
CPBg 25	3317	3144	2922	2279	25	18,5	68	Base m/ tørke: 1350x835x1220
CPBg 29	3858	3741	3294	2790	30	22	69	Base m/500l tank og tørke:
CPBg 34	4210	3987	3728	3263	40	26	71	1940x835x1835
CPBg 35	4517	4300	3933	3417	35	26	69	Base: 1320x830x1555
CPBg 40	5467	5000	4583	4000	40	30	70	Base m/tørke: 1810x830x1555
CPBg 50	6167	5650	5067	4583	50	37	71	

FREKVENNSTYRTE KOMPRESSORER

Spar penger med våre små og mellomstore frekvensstyrte kompressorer. Serien er direkte-drevet med moderne styring og oppbygging. Frekvensstyring kan spare opptil 35% energi.

Leveres i 3 hovedversjoner: gulvmontert (base), tankmontert med eller uten kjøletørke.

Leveringskapasitet: 272-6000 l/min – 7,5-37kw – trenger 400V/50Hz strøm



Modell	l/min @7 bar	Trykkområde bar	Motoreffekt hk kw	Lydnivå dB(A)	Byggemål LxBxH (mm)
CPVSd 10	272	1225	10 7,5	62	Base: 995x655x1045
CPVSd 15	265	1823	15 11	64	Base + tørke: 1415x655x1045
CPVSd 20	258	2217	20 15	65	
CPVSd 21	780	2911	20 15	68	Base: 1200x835x1220
CPVSd 25	780	3205	25 18,5	70	Base m/ tørke: 1350x835x1220
CPVSd 29	780	3920	30 22	71	Base m/500l tank og tørke:
CPVSd 34	780	4158	40 26	72	1940x835x1835
CPVSd 30	767	4050	30 22	68	Base: 1320x830x1555
CPVSd 35	767	4617	35 26	69	Base m/ tørke: 1810x830x1555
CPVSd 40	1000	5450	40 30	70	
CPVSd 50	1067	6000	50 37	71	

INDUSTRI- OG VERKSTEDKOMPRESSORER

Leveres i 3 hovedversjoner: gulvmontert (base), tankmontert med eller uten kjøletørke

Leveringskapasitet: 240-4332 l/min - ES4000 basic styring fra 2.2-30kw - 230-1 / 3fas eller 400V

Type	l/min			Motoreffekt		Lydnivå dB(A)	Byggemål LxBxH (mm)
	8 bar	10 bar	13 bar	hk	kw		
CPM 3	366	294	-	3	2,2	61	Base: 620x630x950
CPM 4	474	366	-	4	3	61	Base+200l tank 1430x600x1260 *)
CPM 5,5	600	516	-	5,5	4	62	Base+270l tank 1540x600x1350 *)
CPM 7,5	888	780	-	7,5	5,5	66	Base+500l tank 1940x605x1500 *)
CPM 9	1062	984	-	10	7,5	68	*) same mål med integrert tørke
CPM 15	1620	1416	1152	15	11	69	850x720x980
CPM 20	1860	1680	1332	20	15	71	850x720x980
CPM 15-20 er også tilgjengelig montert på 500 l tank/tørke: Byggemål 1945x720x1468							
CPM 21	2550	2310	1872	20	15	67	1180x833x1220
CPM 25	3126	2700	2310	25	18,5	69	1180x833x1220
CPM 30	3720	3216	2784	30	22	70	1180x833x1220
CPM 40	4332	3906	3432	40	30	71	1180x833x1220

CPM 21-40 i versjon base+tørke - byggemål: 1450x833x1220

CPM 21-40 i versjon base+500l tank + evt tørke - byggemål 1904x833x1832



Bestselger
i Norge!

ETTERBEHANDLING AV TRYKKLUFT


Kjøletørker for tørr trykkluft med god kvalitet innendørs i verksted/produksjon

Modell	Trykk (bar)	Kapasitet (l/min)	Motor (kw)	Mål (mm)	Vekt (kg)	Bestnr (kr)
AD 15	16	360	0,13/230/1f	350x493x450	19	4102005816
AD 20	16	600	0,16/230/1f	350x493x450	20	4102005817
AD 30	16	840	0,19/230/1f	350x493x450	25	4102005818
AD 40	16	1200	0,27/230/1f	350x493x450	27	4102005819
AD 65	16	1800	0,28/230/1f	370x498x764	44	4102005820
AD 85	13	2340	0,61/230/1f	370x498x764	44	4102005841
AD 105	13	3000	0,68/230/1f	370x498x764	53	4102005842
AD 125	13	3600	0,80/230/1f	460x558x789	55	4102005371
AD 145	13	4080	0,87/230/1f	460x558x789	60	4102005372

Kapasiteter 5200-84000 l/min på forespørsel

Adsorpsjonstørker sikrer enda renere trykkluft, lavere trykkduggpunkt og enda bedre oppetid på maskiner og utstyr som trenger trykkluft.

Vi har 4 typer adsorpsjonstørker som skreddersys til behovet. Kapasiteter fra 1-3000 l/sek. Mest vanlig på mindre anlegg er kaldgenererte adsorpsjonstørker (PH) som brukes til pusteluft, næringsmiddel, instrumentluft m.m. hvor man ønsker høy trykkluftkvalitet. Adsorpsjonstørker kan gi deg duggpunkt ned til minus 70 gr C.

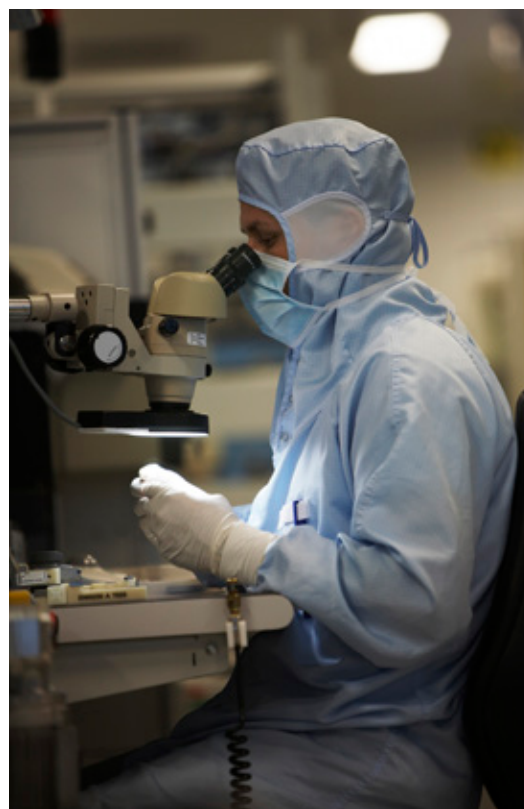

Modell		PH6HE	PH15HE	PH25HE	PH45HE	PH75HE	PH120HE	PH190HE
Kapasitet	l/sek	3	7	12	22	35	55	90
	m ³ /min	11	25	43	79	126	198	324
Luftforbruk	%	18	18	18	18	16,5	16	16,5
Anslutning	G	1/4	1/2	1/2	1/2	1	1	1 1/2
Trykkfall	bar	0,185	0,04	0,125	0,34	0,065	0,18	0,114
Vekt	kg	11	22	29	44	109	140	217
Høyde	mm	855	725	1015	1505	1205	1495	1495
Bredde	mm	197	320	320	320	827	847	907
Lengde	mm	106	149	149	149	394	394	564

Flere andre størrelser og modeller på forespørsel.

TRYKKLUFTFILTER

Filter for trykkluft kan settes sammen på flere forskjellige måter for å oppnå den kvaliteten man ønsker. Normen man vanligvis bruker er ISO 8573 og ISO 12500. Med riktig kombinasjon så beskytter man seg mot fukt, olje, bakterier, virus, karbon og partikler.

Filtartabell (Velg ønsket filtertype først og kapasitet i dimensjonstabellen deretter):

	P	G	S	C	D	V
Partikkelfjerning*	5	-	1	-	0,01	-
Restoljeinnhold*	1	0,3	-	0,01	-	0,003
Mengdeeffektivitet	>90	>99,25	-	>99,9	-	-
Kvalitetsklasse**	4 / 3	- / 3	3 / -	- / 2	1 / -	- / 1
Trykkfall over tørt filter	0,05	0,055	0,055	0,085	0,085	0,115
Trykkfall over fuktig filter***	0,08	0,125		0,125		

* Referansetrykk ved absolutt trykk 1 bar og temperatur 20 gr C

** Iht ISO8573-1:2010 i typiske installasjoner

*** Iht ISO 12500-1 ved oljekonsentrasjon oppstrøms til filter på 10mg/m³ (Grad G=40 mg/m³)

Typiske filterdimensjoner

Str	Kapasitet l/min	Gjenge (tom)	Dimensjoner (AxBxCxE - mm)	Vekt (kg)
2	414	1/4	50x17x157x60	0,25
4	900	3/8	70x24x231x70	0,6
6	1986	1/2	127x32x285x80	1,7
8	2964	1	127x32x285x80	1,7
10	4950	1	127x32x371x80	2,0
11	7932	1 1/4	140x40x475x80	3,0
12	9084	1 1/2	140x40x475x80	3,0

Filterkapasiteter opptil 42500 l/min på forespørsel

Kontakt oss
for riktig filter-
kombinasjon!



TRYKKTANKER

Våre program for trykktanker er laget for trykkluft, men vi har også spesialtanker for Nitrogen og Oksygen samt rustfrie tanker i forskjellige dimensjoner. Kontakt oss dersom du er på jakt etter en spesiell løsning – her er noen av de mest vanlige modellene:

Trykktanker - max 11,5 bar

Beskrivelse	Kapasitet	Max	Best nr
	liter	trykk	
Malt utvendig			
V100 11B	100	11	2236100970
V150 11B	100	11	VEC00709
V200 11B	200	11	2236100971
V270 11B	270	11	2236100972
V500 11B	500	11	2236100973
V720 11B	720	11	2236100974
V900 11B	900	11	2236100975
V1000 12B	1000	11	2236100976
Galvanisert			
V100 11B ZINC	100	11	VEC00901
V200 11B ZINC	200	11	4101000902
V270 11B ZINC	270	11	4101000906
V500 11B ZINC	500	11	4101000910
V725 10,8B ZINC	725	11	4101000914
V900 11B ZINC	900	11	4101000918
V1000 11,5B ZINC	1000	11,5	VEC00519

Trykktanker - max 16 bar

Beskrivelse	Kapasitet liter	Max trykk	Best nr
Malt utvendig			
V500 15B	500	15	VEC0500
V1000 15B	1000	15	VEC00366
V2000 16B	2000	16	4101000950
Galvanisert			
V500 16B ZINC	500	16	4101000963
V1000 16B ZINC	1000	16	4101000965
V2000 16B ZINC	2000	16	4101000967

Trykktanker - Horizontal

Beskrivelse	Kapasitet liter	Max trykk	Best nr
Malt utvendig			
H50 11B	50	11	VEC01251
H500 11B med gaffelfeste	500	11	VEC04670
Galvanisert			
H100 11B	100	11	VEC01772
H270 11B	270	11	VEC01735
H500 11B	500	11	VEC00874



STØYDEMPEDE STEMPELKOMPRESSORER

Støydempet serie fra CP. Vi har tatt frem to modeller; 3HK og 5,5HK. Støynivået er redusert til hhv 64 og 68dB! Andre modeller på forespørsel.



CP S327RS 3HK
Støydempet stempelkompressor

Liten og kompakt med integrert tank på 27l.



Støydempede stempelkompressorer


Finnes i 2,2–5,5kw – både 230 og 400V



Enkelt vedlikehold



Brukervennlig kontroll



Integrert 27l tank

SMÅ STEMPELKOMPRESSORER

Små, støysvake modeller for mindre oppgaver.



Sil-Air 100/50
Støydempet stempelkompressor

Liten oljesmurt modell med dobbelt kompressoraggregat. Meget støysvak.



Sil-Air 50 0,5HK
Støydempet stempelkompressor

Liten oljesmurt modell til mindre arbeider. Leveres med regulator og vannutskiller.



Nardi Silverstone 12/24V
Batteridrevet kompressor

med 5l trykktank.

Modell	Tank (l)	Luft (l/min)	Effekt (HK)	Effekt (kW)	Trykk (Bar)	Hastighet (rpm)	LxBxH (mm)	Støy dB(A)	Vekt (kg)
CP S327RS	27	254	3	2,2	10	1570	780x470x960	65	87
Sil-Air 100	24	74	1	0,68	8		360x650x550	42	50
Sil-Air 50/9 AL	9	40	0,5	0,34	8	2850	350x350x500	43	24
Silverstone 12	5	60	350		8	3300	410x150x390	74	10
Silverstone 24	5	120	350		8	1650	410x150x390	74	10
NTT-327	24	300	3	2,2	10	1250	720x640x1220	63	110
NTT-4270	270	390	4	3	11	1200	1544x695x1505	68	249
NTT-6270	270	490	5,5	4,1	11	1280	1544x695x1505	68	258
NTT-8270	270	630	7,5	5,5	11	1200	1544x695x1505	68	264

OLJEFRIE KOMPRESSORER


Vi har et stort utvalg av oljefrie kompressorer. De finnes både som stempelkompressorer, scroll eller oljefrie skruekompressorer.

Kompressorene velges og tilpasses etter hvilket behov for trykkluft man har.

SCROLL TECHNOLOGY

Nøkkelegenskaper og fordeler

- Oljefri = Risikofritt
- Pålitelighet, brukervennlighet og enkel å bruke
- Solid erfaring og et flott design
- Lavt støynivå
- Kostnadseffektiv

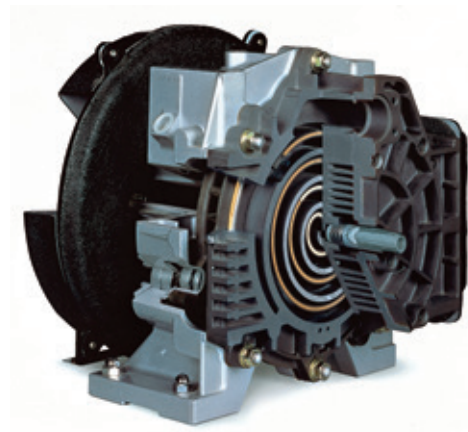

Scroll kompressorer for større laboratorier, tannlegesentraler, melkeroboter:

Modell	Lufttrykk (bar)	Motor (kW)	FAD (l/s)	Støy dB(A)
SPR 2	8	1,5	2,9	53
	10	1,5	1,9	53
SPR 3	8	2,2	4,2	55
	10	2,2	3,4	55
SPR 5	8	3,7	6,7	57
	10	3,7	5,9	57
SPR 8	8	5,5	9,8	59
	10	5,5	7,6	59

Modell	Motor (kW)	Lufttrykk (bar)	FAD (l/s)
LAVTBYGGENDE KABINETT			
SPR 10	2 x 3,7	8	13,4
		10	11,4
SPR 15	2 x 5,5	8	20,3
		10	15,0

OLJEFRIE KOMPRESSORER



Oljefrie stempelkompressorer for tannleger og små laboratorier:

Modell	Ant brukere	Bestnr	Lev mengde	Tank	Motor	Dimensjon	Vekt
CLR 15/25T	1-2	4116092256	125 l/min	25 l	1,1 kw	530x470x670mm	43 kg
CLR 20/25T	2-3	4116092258	155 l/min	25 l	1,5 kw	550x470x700mm	50 kg
CLR25/50T	4-5	4116092290	240 l/min	50 l	2,0 kw	640x470x890mm	60 kg

Disse kan leveres uten tørke, med lyddempingskabinett samt andre motor/tank/konfigurasjoner.

Kontakt oss for ytterligere informasjon.



DIREKTEDREVNE STEMPELKOMPRESSORER

CP sin serie med stempelkompressorer starter med små, lette og effektive direktedrevne modeller. Dette er kvalitetskompressorer for proffe brukere.



Stempelkompressor

Kjekk seketralletype!

CP 324DS 3HK |



Vertikal stempelkompressor

Effektiv kompressor med v-blokk som tar liten plass.

CP 350DS |

Modell	Tank (l)	Luft (l/min)	Effekt (hk)	Effekt (kW)	Trykk (Bar)	Hastighet (rpm)	LxBxH (mm)	Støy dB(A)	Vekt (kg)
CP 350DS	50	265	3	2,2	10	145	520x520x960	93	50
CP 324DS	24	265	3	2,2	10	1450	480x640x740	93	50

REIMDREVNE STEMPELKOMPRESSORER

Disse reimdrevne modellene fra 2 til 10HK passer for serviceverksteder og småindustri.



Stempelkompressor

Støysvak modell, velg 50 eller 90l tank.

CP 350RS |

CP 390RS | 3HK



Stempelkompressor

Ypperlig for mindre dekkverksteder!

CP 6270RT | 5,5HK



Stempelkompressor

Stasjonær modell – en bestselger!

CP 8270RT | 7,5HK



Stempelkompressor

Stasjonær modell for småindustri.

CP 10500RT | 10HK

Modell	Tank (l)	Luft (l/min)	Effekt (HK)	Effekt (kW)	Trykk (Bar)	Hastighet (rpm)	LxBxH (mm)	Støy dB(A)	Vekt (kg)
CP 350RS/CP 390RS	90	300	3	2,2	10	1570	1000x410x900	92	69
CP 6270RT	270	550	5,5	4	11	1000	1520x590x1260	84	180
CP 8270RT	270	670	7,5	5,5	11	1250	1520x590x1260	84	210
CP 10500RT	500	970	10	7,5	11	950	2030x680x1400	94	305



Flott nytt bygg med **toppmoderne verksted** og **automatisert lager**

NTT

TRYKKLUFT- OG
VERKTØYTEKNIKK

NTT AS

Tlf. 35 90 57 70
post@ntt.no

www.ntt.no



Forbehold om trykkfeil.
Bildene på en del produkter er illustrasjons-
foto og kan avvike noe fra virkeligheten

Forhandler:

