

Angle Grinders



Angle Grinders 5 to 7"
Power capacity 3 hp - (2300 W)

CP3T30 SERIES

NTT

TRYKKLUFT- OG
VERKTØYTEKNIKK

**Ta kontakt for en
demonstrasjon - tlf.
35905770 - eller
post@ntt.no**



DO MORE IN LESS TIME

Enter a new dimension in material
removal CP3T30 Series Turbine
Grinders



FEATURES AND BENEFITS

- High material removal for effective grinding
- Excellent power-to-weight ratio
- Compact design for hard-to-reach applications
- Autobalancer to minimize vibration for operator comfort
- Low noise level of only 78 dB(A) for a quieter workspace



See accessories page 134

MODEL	PART NUMBER	FREE SPEED	AUTO- BALANCER	POWER	MAX WHEEL CAPACITY	SPINDLE THREAD	AIR CONS. @LOAD	NET WEIGHT	LENGTH	VIBRATION LEVEL ISO 28927 (M/S2)	SOUND PRESS.	SOUND POWER	AIR INLET				
		rpm		hp	W	in.	mm	in.	cfm	l/s	lb	kg	in.	mm	a	ISO 15744 - dB(A)	in.
CP3T30-085AH7V	615 160 7930	8,500	Yes	3.1	2300	7	180	HEXA	68	32	5.5	2.5	11.9	302	2.8	79	79 3/8
CP3T30-120AA5V	615 160 7940	12,000	Yes	3.1	2300	5	125	M14	68	32	5.3	2.4	11.9	302	3.5	79	79 3/8
CP3T30-120AH5V	615 160 7920	12,000	Yes	3.1	2300	5	125	HEXA	68	32	5.1	2.3	11.9	302	3.5	78	78 3/8

All models: Hose int. 3/8" (10 mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

2300 W

(3 hp)*

Turbine engine for optimal material removal rate

2.3 kg

(5.1 lbs) only**

Light to hold, even at arm's length

86 mm

(3.4 in) height only

Ideal for use in restricted spaces

Featuring ease of use, safety and prevention of TMS risks



Spindle lock and guard positioning button

Quick guard adjustment with simple and secure abrasive replacement for optimum safety.



Lateral exhaust


Protects the operator's hands from cold exhaust air and reduces risk of material deformation.



Auto balancer and adjustable vibration handle

Optimal comfort over extended periods so your operator works safer for longer.

Dimensions

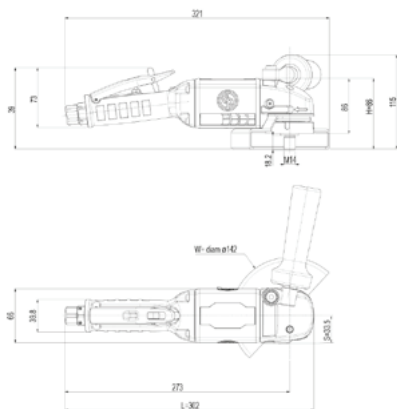

MODEL	L		H		WIDTH		SIDE TO CENTER	
	mm	in.	mm	in.	mm	in.	mm	in.
CP3T30-120AH5V	302	11.9	86	3.4	142	5.6	33.5	1.3
CP3T30-85AH7V	302	11.9	86	3.4	200	7.9	33.5	1.3
CP3T30-120AA5V	302	11.9	86	3.4	142	5.6	33.5	1.3

Remove 63%* more material than a standard vane grinder during the same period of time



Air efficiency kit - Filter regulator

PN 615 450 1105

includes 1/2" BSP,
Regulator adjusting knob
5 µm Filter,
Diaphragm-type pressure valve

Key Benefits

- Enhances tool performance for consistent and efficient operation
- Extends tool lifespan by preventing dust and water contamination
- Quick & easy installation for minimal downtime

Compatible with BSP and NPT system

* Results are based on Chicago Pneumatic tests laboratory