



General Industry Catalog

For general & industrial shop
and field operations.

Battery torque wrenches



CP86 SERIES

QUALITY ANYWHERE. PERFORMANCE ANYTIME.

Extended mobility and high precision with no compromise on safety. Thanks to CPLinQ app, add control to your process quality while in the field.



CPCare

FEATURES AND BENEFITS

- High precision with +/- 4%
- Safe tightening with second start button as standard
- Extended mobility with lightweight and compact battery
- Automatic release reaction arm
- Intuitive handling either on OLED Digital screen of the tool or via CPLinQ app



Oil & Gas



Mining



Power generation



Heavy vehicles

Railroad & Rolling stock

Agricultural equipment

Shipyard

Construction



How to choose your battery torque wrench

1 Choose your application torque range

Models						
	CP8603	CP8609	CP8613	CP8626	CP8641	CP8681
	up to 325 Nm / 240 ft.lb	up to 900 Nm / 530 ft.lb	up to 1300 Nm / 960 ft.lb	up to 2600 Nm / 1910 ft.lb	up to 4100 Nm / 3020 ft.lb	up to 8100 Nm / 5970 ft.lb

2 Choose the feature version

		Standalone	C - Connected	CQ - Connected Quality	TC - Torque Check
		All models			
Performance	Digital OLED display	✓	✓	✓	✓
	Automatic release reaction arm	✓	✓	✓	✓
	Torque tightening	✓	✓	✓	✓
	Counterclockwise tightening	✓	✓	✓	✓
Safety	Double safety button (second start safety trigger)	✓	✓	✓	✓
	Tool lock & finder		✓	✓	✓
Connectivity	CPLinQ		✓	✓	✓
Tool maintenance	Tool status follow-up management		✓	✓	✓
	Operation alert		✓	✓	✓
	Maintenance timeline		✓	✓	✓
Job control	Angle tightening		✓	✓	✓
	P-Set library (up to 6 P-Set in the tool)		✓	✓	✓
	Counting sequence			✓	✓
Report	Tightening report			✓	✓
Process control	Torque Check				✓


Battery Torque Wrenches

3 Choose your accessories

						
	S Type	Square Type	Steel space bar	Sliding-drive	Blade	Suspension yoke
Model	Part number					
CP8603	615 813 6285	615 813 6325	615 813 6335	615 813 6305	-	615 813 6310
CP8609	6158136835	6158136855	6158136845	6158136865 & 6158136875 (ext)	-	8940166654
CP8613	615 813 1800	615 813 1890	615 813 1830	615 813 1860	615 813 6100	615 813 1770
CP8626	615 813 1810	615 813 1900	615 813 1840	615 813 1870	-	615 813 1780
CP8641	615 813 1820	615 813 1910	615 813 1850	615 813 1880	-	615 813 1790
CP8681	615 813 5251	615 813 5281	615 813 5261	615 813 5271	-	615 813 5291

						
	Fish arm Based Kit	Fish arm + Shoe Kit	Long shaft 760 mm	Nose extension 300 mm	Nose extension 480 mm	Adaptor Kit CPxx41 to CPxx26
Compatible model	Part number					
CP8613				615 178 0970		
CP8626	615 180 0560	615 180 0550	615 501 2750	615 178 0980	615 178 0990	615 180 0570
CP8641	615 180 0560	615 180 0550	615 501 2750	615 178 1000		

Dimensions

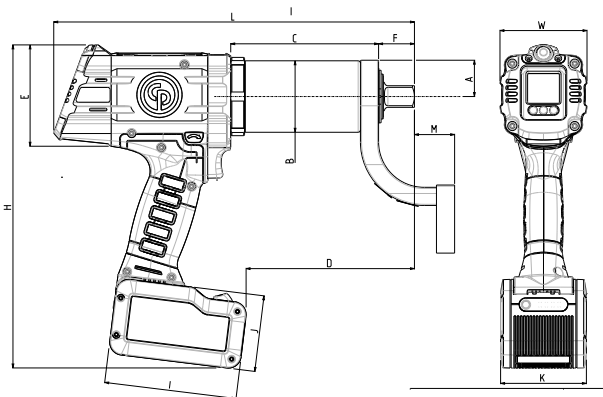

		A	B	C	D	E	F	I	J	K	M	Height (H)	Length (L)	Width (W)
CP8603	in.	1.10	2.13	3.58	4.37	3.5	1.34	4.57	2.64	2.99	0.67	11.22	11.06	3.03
	mm	28	54	91	111	89	34	116	67	76	17	285	281	77
CP8609	in.	1.32	2.64	6.02	6.73	3.5	1.26	4.57	2.64	2.99	1.34	11.22	13.43	3.03
	mm	34	67	153	171	89	32	116	67	76	34	285	341	77
CP8613	in.	1.26	2.48	5.12	5.83	3.5	1.26	4.57	2.64	2.99	1.38	11.22	12.52	3.03
	mm	32	63	130	148	89	32	116	67	76	35	285	318	77
CP8626	in.	1.42	2.64	6.61	7.64	3.5	1.57	4.57	2.64	2.99	1.77	11.22	14.29	3.03
	mm	36	67	168	194	89	40	116	67	76	45	285	363	77
CP8641	in.	1.97	3.19	8.46	9.41	3.5	1.5	4.57	2.64	2.99	1.65	11.22	16.1	3.98
	mm	50	81	215	239	89	38	116	67	76	42	285	409	101
CP8681	in.	2.01	4.02	7.99	9.65	3.5	2.2	4.57	2.64	2.99	2.56	11.22	16.3	4.17
	mm	51	102	203	245	89	56	116	67	76	65	285	414	106

BATTERY CHARGER CP18-36CH

See details page <?>



BATTERY PACK CP36XP25 36V 2,5Ah

See details page <?>





OPTIMIZE PROCESSES AND QUALITY IN THE FIELD

CPLinQ is an application specifically dedicated for managers looking to control processes and quality in the field to further improve productivity.



Maintain your tool

Decrease the risk of breakage with:

- > Tool status follow-up management
- > Operation alert
- > Maintenance timeline



Control your tightening and counting sequence with:

P-Set library featuring dedicated requirements for each job


Counting sequence for 100% tightening guarantee and 0% rework

Torque Check to control bolt loosening and adjust torque when necessary



Report your jobs

Tightening report for a quick report and data export

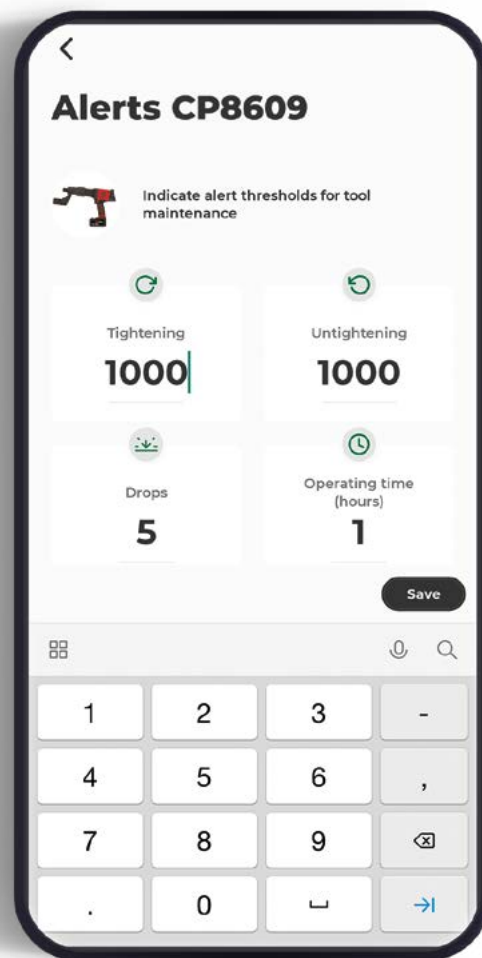

« With data collection, sequence set-up and maintenance timeline, CPLinQ is the perfect solution to secure your jobs in the field! »

Battery torque wrenches



CP8603



CP8609



CP8613

**QUALITY ANYWHERE.
PERFORMANCE ANYTIME.**

FEATURES AND BENEFITS

- High precision with +/- 4%
- Safe tightening with second start button as standard
- Extended mobility with lightweight and compact battery
- Automatic release reaction arm
- Intuitive handling either on OLED Digital screen of the tool or via CPLinQ app



See accessories 61

MODEL	PART NUMBER	DRIVE	FREE SPEED	WORKING TORQUE		MAX TORQUE		WEIGHT		LENGTH		HEIGHT		WIDTH		VIBRATION LEVEL ISO 28927 (M/S2)		SOUND PRESS.	SOUND POWER	BATTERY
		in.	rpm	ft.lb	Nm	ft.lb	Nm	lb	kg	in.	mm	in.	mm	in.	mm	a	k	ISO 15744 - dB(A)	V	Ah
CP8603 PACK 36V 2.5AH	615 157 0380	3/4	20	51.6-192	70-260	240	325	6.39	2.9	14.29	363	11.22	285	3.03	77	<2.5	-	0	0	2.5 36 V
CP8603C PACK 36V 2.5AH	615 157 0390	3/4	20	51.6-192	70-260	240	325	6.39	2.9	14.29	363	11.22	285	3.03	77	<2.5	-	0	0	2.5 36 V
CP8603CQ PACK 36V 2.5AH	615 157 0400	3/4	20	51.6-192	70-260	240	325	6.39	2.9	14.29	363	11.22	285	3.03	77	<2.5	-	0	0	2.5 36 V
CP8603TC PACK 36V 2.5AH	615 157 0410	3/4	20	51.6-192	70-260	240	325	6.39	2.9	14.29	363	11.22	285	3.03	77	<2.5	-	59	0	2.5 36 V
CP8609 PACK 36V 2.5AH	615 157 1120	1	15	185-530	250-720	665	900	5.7		13.43	341	11.22	285	3.03	77	<2.5	-	58	0	2.5 36 V
CP8609C PACK 36V 2.5AH	615 157 1130	1	15	185-530	250-720	665	900	5.7		13.43	341	11.22	285	3.03	77	<2.5	-	58	0	2.5 36 V
CP8609CQ PACK 36V 2.5AH	615 157 1140	1	15	185-530	250-720	665	900	5.7		13.43	341	11.22	285	3.03	77	<2.5	-	58	0	2.5 36 V
CP8609TC PACK 36V 2.5AH	615 157 1150	1	15	185-530	250-720	665	900	5.7		13.43	341	11.22	285	3.03	77	<2.5	-	58	0	2.5 36 V
CP8613 PACK 36V 2.5AH	615 157 0000	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V
CP8613 WOB PACK 36V 2.5AH	615 157 0340	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V
CP8613C PACK 36V 2.5AH	615 157 0010	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V
CP8613C WOB PACK 36V 2.5AH	615 157 0350	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V
CP8613CQ PACK 36V 2.5AH	615 157 0020	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V
CP8613CQ WOB PACK 36V 2.5AH	615 157 0360	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V
CP8613TC PACK 36V 2.5AH	615 157 0670	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V
CP8613TC WOB PACK 36V 2.5AH	615 157 0710	3/4	10	221-767	300-1040	959	1,300	8.16	3.7	12.52	318	11.22	285	3.03	77	<2.5	-	83	0	2.5 36 V



CP8626



CP8641



CP8681

See accessories 61

MODEL	PART NUMBER	DRIVE	FREE SPEED	WORKING TORQUE		MAX TORQUE		WEIGHT		LENGTH		HEIGHT		WIDTH		VIBRATION LEVEL ISO 28927 (M/S2)		SOUND PRESS.	SOUND POWER	BATTERY	
		in.	rpm	ft.lb	Nm	ft.lb	Nm	lb	kg	in.	mm	in.	mm	in.	mm	a	k	ISO 15744 - dB(A)	V	Ah	
CP8626 PACK 36V 2.5AH	615 157 0030	1	5	516-1530	700-2080	1,920	2,600	11	5	14.29	363	11.22	285	3.03	77	<2,5	-	83	0	2.5	36 V
CP8626C PACK 36V 2.5AH	615 157 0040	1	5	516-1530	700-2080	1,920	2,600	11	5	14.29	363	11.22	285	3.03	77	<2,5	-	83	0	2.5	36 V
CP8626CQ PACK 36V 2.5AH	615 157 0050	1	5	516-1530	700-2080	1,920	2,600	11	5	14.29	363	11.22	285	3.03	77	<2,5	-	83	0	2.5	36 V
CP8626TC PACK 36V 2.5AH	615 157 0680	1	5	516-1530	700-2080	1,920	2,600	11	5	14.29	363	11.22	285	3.03	77	<2,5	-	83	0	2.5	36 V
CP8641 PACK 36V 2.5AH	615 157 0060	1	3	738-2420	1000-3280	3,020	4,100	18.9	8.6	16.1	409	11.22	285	3.98	101	<2,5	-	83	0	2.5	36 V
CP8641C PACK 36V 2.5AH	615 157 0070	1	3	738-2420	1000-3280	3,020	4,100	18.9	8.6	16.1	409	11.22	285	3.98	101	<2,5	-	83	0	2.5	36 V
CP8641CQ PACK 36V 2.5AH	615 157 0080	1	3	738-2420	1000-3280	3,020	4,100	18.9	8.6	16.1	409	11.22	285	3.98	101	<2,5	-	83	0	2.5	36 V
CP8641TC PACK 36V 2.5AH	615 157 0690	1	3	738-2420	1000-3280	3,020	4,100	18.9	8.6	16.1	409	11.22	285	3.98	101	<2,5	-	83	0	2.5	36 V
CP8681 PACK 36V 2.5AH	615 157 0090	1-1/2	1	1480-4780	2000-6480	5,970	8,100	25.1	11.4	16.3	414	11.22	285	4.17	106	<2,5	-	83	0	2.5	36 V
CP8681C PACK 36V 2.5AH	615 157 0190	1-1/2	1	1480-4780	2000-6480	5,970	8,100	25.1	11.4	16.3	414	11.22	285	4.17	106	<2,5	-	83	64	2.5	36 V
CP8681CQ PACK 36V 2.5AH	615 157 0200	1-1/2	1	1480-4780	2000-6480	5,970	8,100	25.1	11.4	16.3	414	11.22	285	4.17	106	<2,5	-	83	64	2.5	36 V
CP8681TC PACK 36V 2.5AH	615 157 0700	1-1/2	1	1480-4780	2000-6480	5,970	8,100	25.1	11.4	16.3	414	11.22	285	4.17	106	<2,5	-	83	64	2.5	36 V

CP66-CP86-CP76 - RECOMMENDED ACCESSORIES

S TYPE REACTION ARM



MODEL	PART NUMBER
CP8603	615 813 6285
CP8609	615 813 6835
CP8613/CP6613	615 813 1800
CP8626/CP6626	615 813 1810
CP8641/CP6641	615 813 1820
CP8681	615 813 5251

SQUARE BRAKET



MODEL	PART NUMBER
CP8603	615 813 6325
CP8609	615 813 6855
CP8613/CP6613	615 813 1890
CP8626/CP6626	615 813 1900
CP8641/CP6641	615 813 1910
CP8681	615 813 5281

SLIDING DRIVE



MODEL	PART NUMBER
CP8603	615 813 6305
CP8609	6158136865 & 6158136875 (extended)
CP8613/CP6613	615 813 1860
CP8626/CP6626	615 813 1870
CP8641/CP6641	615 813 1880
CP8681	615 813 5271

STEELSPACE BAR



MODEL	PART NUMBER
CP8603	615 813 6335
CP8609	615 813 6845
CP8613/CP6613	615 813 1830
CP8626/CP6626	615 813 1840
CP8641/CP6641	615 813 1850
CP8681	615 813 5261



**Fish arm
Based Kit**



**Fish arm +
Shoe Kit**



**Long shaft
760 mm**



**Nose extension
300 mm**



**Nose extension
480 mm**



**Adaptor Kit
CPxx41 to CPxx26**

COMPATIBLE MODEL	PART NUMBER				
CP8613/CP6613				615 178 0970	
CP8626/CP6626	615 180 0560	615 180 0550	615 501 2750	615 178 0980	615 178 0990
CP8641/CP6641	615 180 0560	615 180 0550	615 501 2750	615 178 1000	615 180 0570

Impact & torque wrenches accessories



JAPANESE TYPE CUP

MODEL	PART NUMBER
CP8609-C/CP8609C-CT/CP8609CQ-C/CP8609CQ-CT/CP8609CQ-xC/CP8609CQ-xCT/CP8609-CT/CP8609C-xC/CP8609C-xCT/CP8609TC-C/CP8609TC-CT/CP8609TC-xC/CP8609TC-xCT/CP8609-xC/CP8609-xCT/CP7600C-R/CP7600xC-R/CP7600C-R4P/CP7600xC-R4P	894 016 7401



SPRING LOADED CUP

MODEL	PART NUMBER
CP8609-C/CP8609C-CT/CP8609CQ-C/CP8609CQ-CT/CP8609CQ-xC/CP8609CQ-xCT/CP8609-CT/CP8609C-xC/CP8609C-xCT/CP8609TC-C/CP8609TC-CT/CP8609TC-xC/CP8609TC-xCT/CP8609-xC/CP8609-xCT/CP7600C-R/CP7600xC-R/CP7600C-R4P/CP7600xC-R4P	894 016 4622



NUT

MODEL	PART NUMBER
CP8603	615 670 2600
CP8609	615 670 2600



SUSPENSIONS FOR SERIES CP76.. AND CP86..

MODEL	DESCRIPTION	PART NUMBER
CP7600/CP8609	SUSPENSION YOKE CP7600 NON DISMOUNTABLE	894 016 6654
CP7600xB	SUSPENSION YOKE CP7600-NOR	894 016 6659
CP8603	SUSPENSION YOKE	615 813 6310
CP8609	SUSPENSION YOKE	894 016 6654
CP8613/CP6613	SUSPENSION YOKE	615 813 1770
CP8626/CP6626	SUSPENSION YOKE	615 813 1780
CP8641/CP6641	SUSPENSION YOKE	615 813 1790
CP8681	SUSPENSION YOKE	615 813 5291



BALANCERS

CORRESPONDING TOOLS	BALANCER MODEL	PART NUMBER	LOAD RANGE		STROKE		NET WEIGHT	
			lb	kg	ft	m.	lb	kg
CP6613	CP9937	894 109 9370	8.8-13.2	4.0-6.0	8.2	2.5	7.1	3.2
CP6626	CP9938	894 109 9380	13.2-17.6	6.0-8.0	8.2	2.5	7.7	3.5
CP6641	CP9939	894 109 9390	17.6-22.0	8.0-10	8.2	2.5	8.2	3.7